


AUSSENGEWINDE EXTERNAL THREADS

SPANNSCHLOSS, F30 GEHÄMMERT TURNBUCKLE THREADS, F30 HAMMERED

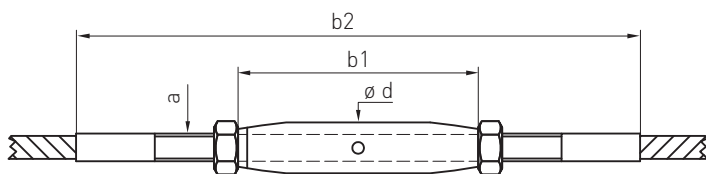

Artikelnummer Part number	a	b1	b2	ø d	ø Seil ø rope	Spannweg Adjustment	kN
828-0400-02	M5	80	160	8	4	+38 -42	7,1
828-0500-02	M6	92	178	10	5	+32 -40	11,2
828-0600-02	M8	112	214	13,5	6	+36 -47	16
828-0800-02	M10	120	236	17,2	8	+30 -44	25
828-1000-02	M12	150	280	21,3	10	+24 -40	41,6

Werkstoff 1.4404 | Außengewinde links/rechts, verpresst, sind je halb im Spannrohr eingeschraubt.
Die minimale Einschraubtiefe beträgt 1,5 x Gewinde-ø (M8 = 12 mm) | Nicht geeignet für Spiralseile 1x19 | kN = Bruchkraft
 Material AISI 316L | Left/right swaged external threads are screwed half way into the turnbuckle.
 The minimum screw-in depth is 1.5 x thread ø (M8 = 12 mm) | Not suitable for strand 1x19 | kN = breaking load

Alle Angaben in Millimetern
 All dimensions in millimeters