


RINGSCHRAUBE  
EYE BOLT

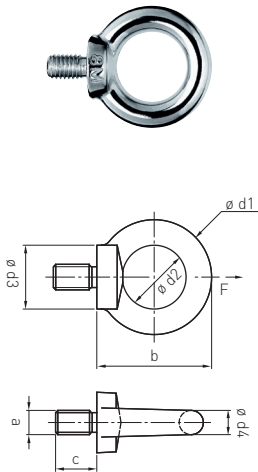

Artikelnummer Part number	a	b	c	$\varnothing d_1$	$\varnothing d_2$	$\varnothing d_3$	$\varnothing d_4$	MBK (kN)	F (kg)
837-0600-01*	M6	28	12	28	16	17	6	-	-
837-0600	M6	36	13	36	20	20	8-11	8,2	140
837-0800-01*	M8	36	13	36	20	20	8	-	-
837-0800	M8	36	13	36	20	20	8-11	8,2	140
837-1000-01*	M10	45	17	45	25	25	10	-	-
837-1000	M10	45	17	45	25	25	10-13	13,5	230
837-1200-01*	M12	53	21	54	30	30	12	-	-
837-1200	M12	53	21	54	30	30	12-15	20,0	340
837-1600	M16	62	27	63	35	35	14-17	41,2	700

Werkstoff 1.4401 | DIN 580 | geschmiedet \*Ähnlich DIN 580 | gegossen und poliert  
MBK= Mindestbruchkraft | F = Tragfähigkeit

Material AISI316 | DIN 580 | drop-forged | \*casted and mirror polished  
MBK= Breaking load | F = Working load limit

Alle Angaben in Millimetern  
All dimensions in millimeters