

Towards sustainable agriculture: fossil-free ammonia

Peter H. Pfromm, Department of Chemical Engineering, Kansas State University,
1005 Durland Hall, 1701A Platt Street, Manhattan, Kansas, 66506-5102, U.S.A. (pfromm@ksu.edu)

Abstract

About 40% of our food would not exist without synthetic ammonia (NH_3) for fertilization. Yet, NH_3 production is energy intensive. About 2% of the world's commercial energy is consumed as fossil fuels for NH_3 synthesis based on the century-old Haber-Bosch (H.-B.) process. The state of the art and the opportunities for reducing the fossil energy footprint of industrial H.-B. NH_3 synthesis are discussed. It is shown that even a hypothetical utterly revolutionary H.-B. catalyst could not significantly reduce the energy demand of H.-B. NH_3 as this is governed by hydrogen production. Renewable energy-enabled, fossil-free NH_3 synthesis is then evaluated based on the exceptional and continuing cost decline of renewable electricity. H.-B. syngas (H_2 , N_2) is assumed to be produced by electrolysis and cryogenic air separation, and then supplied to an existing H.-B. synthesis loop. Fossil-free NH_3 could be produced for energy costs of about \$232 per tonne NH_3 without claiming any economic benefits for the avoidance of about 1.5 tonnes of CO_2 released per tonne NH_3 compared to the most efficient H.-B. implementations. Research into alternatives to the H.-B. process might be best targeted at emerging markets with currently little NH_3 synthesis capacity but significant future population growth such as Africa. Reduced capital intensity, good scale-down economics, tolerance for process upsets and contamination, and intermittent operability are some desirable characteristics of NH_3 synthesis in less developed markets, and for stranded resources. Processes that are fundamentally different from H.-B. may come to the fore under these specific boundary conditions.

Keywords

Ammonia; Haber-Bosch; renewable; fossil-free; fertilizer; economical

Highlights

- There is no motivation for research to improve or replace Haber-Bosch catalysts due to the overwhelming impact of hydrogen production on the economics and the energy footprint.
- The cost of electricity from renewables has sharply declined and will likely continue to do so.
- Haber-Bosch ammonia synthesis facilities can be retrofitted with existing technology for competitive wind electricity-based feedstock preparation to produce fossil-free ammonia.
- Research for alternatives to the Haber-Bosch process should be directed at emerging market and stranded resource requirements instead of attempting to replace existing Haber-Bosch facilities.

34 The world scale and impact of ammonia synthesis

35 Each year, about 174 million tonnes of ammonia (NH_3) are synthesized globally (1), making NH_3 the
36 second most produced man made chemical. More than 85% of NH_3 is used in fertilizers, with the
37 remainder used mainly by other areas of the chemical- and process industries. NH_3 is produced by using
38 a significant amount of energy to convert the hydrogen from water, and nitrogen from air to NH_3 . Water
39 is always the hydrogen source, both directly as process steam, and indirectly as the water absorbed by
40 ancient biomass, and now used as hydrogen from methane as natural gas. The prevalent energy source is
41 combustion of natural gas (U.S., Middle East) or coal (mainly in China) to CO_2 . About 600kg of natural
42 gas are consumed to produce 1000 kg NH_3 in the most efficient facilities.(2,3) The total fossil CO_2
43 emissions from NH_3 synthesis with the current basket of energy sources can be estimated at more than
44 670 million tonnes per year. This estimate is based on the tonnage of ammonia made using natural gas
45 or coal, and the known estimate of CO_2 emission from using either feedstock.(4,5) This amounts to about
46 2.5% of all fossil fuel based CO_2 emissions world wide (6). NH_3 synthesis based on renewable energy
47 and raw materials would therefore be beneficial in moving towards a sustainable future where food and
48 fossil fuels are decoupled.

49 NH_3 is at the intersection of food, energy, and water, and this nexus is attracting increasing interest
50 due to an expected increase of the world population (7), the impact of climate change (8), and an expected
51 world-wide decrease of arable land per capita (9). In the United States, about 30% of commercial energy
52 spent to produce crops is used to synthesize NH_3 (10). NH_3 enables 30-50% of agricultural crop output
53 (11) and conserves water by increasing the crop yield per unit water used (12,13). The escape of unused
54 agricultural fertilizers into the environment is of significant concern. Attempts are being made through
55 precision agriculture (14), and modified application methods (time-release etc., (15)) to address this.
56 Environmental concerns and farmer's interests are aligned since unused fertilizer is a significant financial
57 loss to farmers.

58 Synthetic NH_3 -based fertilizers will remain essential to the survival of a significant and increasing
59 fraction of the world population far into the future (16). Obtaining nitrogenous fertilizer from animal or
60 human waste at an impactful scale would require collection, transport, storage (due to seasonal demand),
61 and processing of vast amounts of manure with relatively low concentrations of bio-available N, with the
62 concomitant energy- and economic expenditures, and environmental impact. About 5% of U.S. cropland
63 is currently fertilized with manure. Due to the above issues and many additional barriers human and
64 animal waste is unlikely to significantly impact the need for synthetic fertilizers (17). Another aspect of
65 the global impact of the presence or absence of bioavailable nitrogen is lack of bioavailable nitrogen

65 capturing carbon sequestration from the atmosphere as biomass (18). There are considerations of adding
67 man-made bioavailable nitrogen to natural systems for example for fertilization in the ocean to sequester
68 fossil CO₂ (19).

69 The capacity of NH₃ to serve as a convenient hydrogen (H₂) carrier (20), or to be used directly as a
70 hydrogen-rich fuel or fuel additive in internal combustion engines is an emerging aspect. Compared to
71 H₂, NH₃ is liquefied fairly easily and liquid NH₃ exceeds the U.S. Department of Energy's (DOE) target
72 for hydrogen storage per volume. Bulk NH₃ storage and transport by pipeline, rail, and truck, and
73 delivery down to the retail scale is well established, as opposed to transport, storage, and distribution of
74 H₂. This has been recognized and well described in a recent funding opportunity made available by DOE
75 (21).

76 In summary, world production of synthetic NH₃ will have to increase significantly from now about
77 174 million tonnes per year during the next decades as the world population increases, specifically in
78 Africa. Use of NH₃ as a renewable fuel and energy storage mode might further increase this demand.

79 **Rising world-wide interest in ammonia**

80 Significant U.S. government programs amounting to in excess of U.S. \$30 million in 2016 alone
81 towards aspects of NH₃ synthesis and applications have recently emerged and will result in an invigorated
82 interest in NH₃ synthesis and applications in the coming years (21, 22, 23, 24, 25). Activities in Japan
83 and Europe towards using NH₃ as a mode of energy storage and transport are also on the rise (26, 27, 28),
84 often in form of public/private partnerships.

85 In light of the substantial decline of the cost of renewable electrical energy in the U.S., and due to the
86 rising interest in NH₃ synthesis and applications, it seems timely to estimate if renewable electricity might
87 be an avenue to fossil-free NH₃, and thereby substantially reduced dependency of food on fossil fuels.
88 The state of the art process is reviewed below, followed by an assessment of renewable electricity enabled
89 Haber-Bosch NH₃ synthesis.

90 **Review of the state of the art Haber-Bosch process implementation**

91 There are two major challenges to NH₃ synthesis: first, activating dinitrogen (essentially somehow
92 breaking the exceptionally strong dinitrogen triple bond), and second, obtaining hydrogen to convert
93 activated nitrogen to NH₃. The former allows a process to exist, but the latter governs the energy demand
94 and economic viability (as shown below). Both tasks must be done at technologically acceptable
95 conditions and at a cost commensurate with the value added by using ammonia in agriculture. Fritz
96 Haber's Nobel Prize (29) was for fundamentally solving the nitrogen activation issue. He secured
97 economical success by patenting recycling of valuable unreacted syngas after separating NH₃. Carl

Haber's Nobel Prize ((30), with F. Bergius) relates in large part to the economical large-scale supply of hydrogen for NH_3 synthesis. Their work created the commercial fertilizer industry and averted imminent worldwide food shortages.(31) There were even at the time of Haber's discoveries a number of competing approaches to synthesize NH_3 at the technical scale, but none of them could match the economics of the integrated Haber-Bosch process (31). However, these economics are based on fossil fuels and of course do not take the impact of the release of fossil CO_2 into the atmosphere in account.

A brief review of the Haber-Bosch (H.-B.) process will show that today's challenge for large-scale NH_3 synthesis is no longer the catalytic conversion of dinitrogen and dihydrogen to NH_3 . While the technology is complex, the chemistry is simple: hydrogen and nitrogen combine to produce NH_3 . Figure 1 shows both the overall chemical process to produce the syngas (H_2 , N_2) for the H.-B. synthesis, and the chemical reaction taking place in a H.-B. reactor.

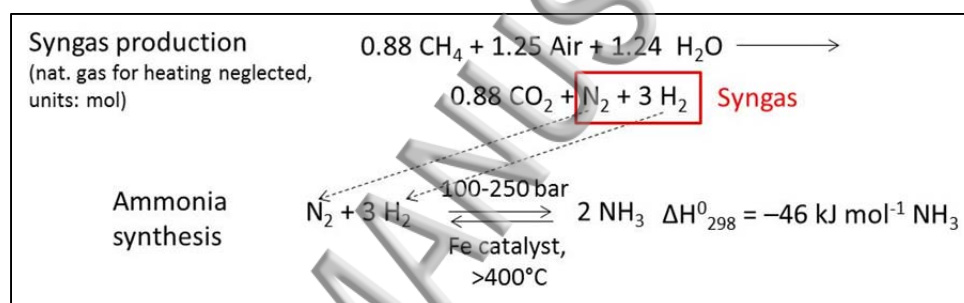



Figure 1 NH_3 synthesis, top: state of the art overall chemical reaction to produce synthesis gas (syngas) from air, water, and natural gas; bottom: the reaction in the Haber-Bosch synthesis reactor.

Figure 2 shows the main sections of what is generally termed the H.-B. process using the most energy efficient state of the art approach based on natural gas as both feedstock and energy source. The reader is directed to the literature for exhaustive treatment of many variations such as using coal as energy source, sophisticated changes of heat integration of the process steps, catalysts, catalyst fundamentals, and many other issues (32, 33). The discussion below attempts to use the current best available technology characteristics.

The most efficient implementations of the natural gas steam reforming based H.-B. process today at industrial scale use about 600 kg of natural gas per 1000 kg anhydrous NH_3 produced (as used in Figure 2), or about 6.8 Gcal/tonne NH_3 (as natural gas lower heating value, LHV). Various plants may however use significantly more energy depending on the technology in use. If coal is used, the energy demand may approach at best 1.7 times that of an efficient natural gas based plant.

Over the last 100 years, engineering and heat integration of the overall process has led to an approach to the thermodynamic minimum energy demand that is quite impressive. The thermodynamic minimum

125 has been estimated at 4.98 Gcal/tonne NH₃ (as natural gas lower heating value, (3). 5.10 Gcal/tonne NH₃
 126 (product liquid ammonia) has been reported as the thermodynamic minimum elsewhere ((34), higher
 127 heating value, HHV). Overall, current full scale (1000 tonnes per day NH₃ and larger) energy
 128 consumption of the best technology available is therefore only about 20% above the immutable
 129 thermodynamic minimum when using the state of the art natural gas based Haber-Bosch process outlined
 130 below.

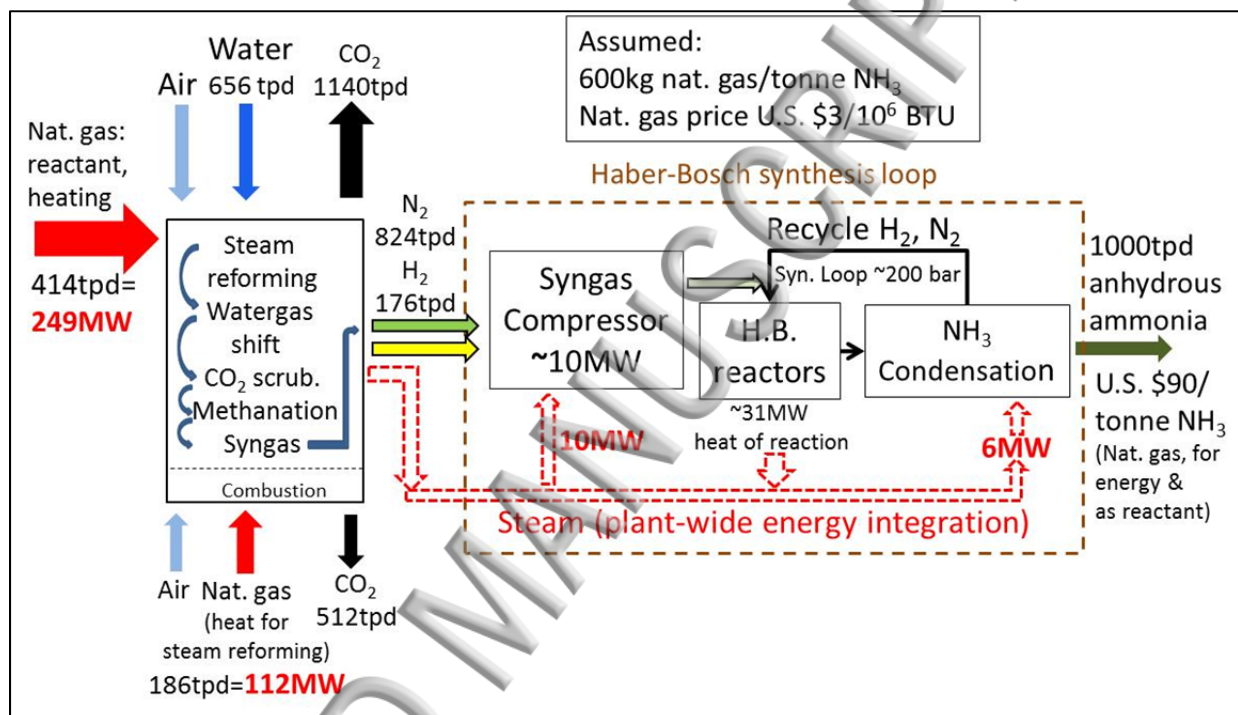

131
 132 **Figure 2** The state of the art Haber-Bosch process to produce NH₃ from natural gas (methane). Natural
 133 gas is used to provide energy for steam reforming using combustion, and also to provide both hydrogen
 134 and nitrogen by steam reforming and subsequent water gas shift (left). (tpd = tonne per day)

135 The single-pass conversion in the Haber-Bosch reactors depends on a number of operational
 136 parameters such as the level of inerts like argon. It is reported often at less than 20%, certainly no more
 137 than 30% (4,35). Unreacted hydrogen and nitrogen is always recycled (at pressure) after NH₃ is
 138 condensed and separated. The synthesis loop carries an inert load (argon from air, methane from
 139 methanation) that is controlled by purging a small stream (not shown). Oxygen or oxides must not enter
 140 the synthesis loop since this would inactivate the catalyst. Catalyst charge lifetimes are on the order of
 141 many years in industrial practice.

142 The steam to drive the synthesis loop compressor is generated through heat recovery from the primary
 143 reformer and cooling of the highly exothermic NH₃ synthesis reaction, with additional steam left for other
 144 purposes such as driving compression for refrigeration to condense ammonia, or for export.

145 **Price of ammonia and energy to produce ammonia**

146 The price of ammonia is closely related to the price of the feedstock (36, 2013 data). Labor and other
147 (tax, insurance etc.) add perhaps 25% in the U.S. or Russia, while the high price of feedstock in Europe
148 compared to the U.S. essentially drowns out all other costs. The historically close tracking of NH_3 price
149 and natural gas cost has relaxed in the U.S. since 2008 due to strong demand for NH_3 and the resulting
150 price increase. For 2016, a price of \$500-600 per tonne ammonia has been reported, with a minimum of
151 \$499 per tonne since 2008 (37).

152 Above, the price for natural gas is assumed at a perhaps optimistic \$3/MM BTU. Predictions of the
153 natural gas price would be extremely speculative. Renewable electricity is assumed at \$0.0235/kWh as
154 verified by DOE, and reported to be highly likely to decrease in the future (38).

155 **Further research on Haber-Bosch catalysts has essentially no impact on energy demand per** 156 **tonne of ammonia**

157 The close approach to thermodynamic limits for the full-scale existing H.-B. process imposes harsh
158 requirements on any aspirations to improve over H.-B. as far as energy consumption per unit NH_3
159 produced.

160 If one assumes quite hypothetically operating the synthesis loop using a revolutionary catalyst at
161 atmospheric pressure and room temperature and simultaneously improved catalyst performance, then this
162 extremely unlikely scenario will only offer a few percent overall energy savings (see Figure 2). This
163 further illustrates that NH_3 synthesis equals hydrogen synthesis from an economic (and thereby energy-)
164 standpoint, as Carl Bosch pointed out. While there may exist academic or scientific reasons to further
165 pursue, for example, improved H.-B. catalysts, there is no need or opportunity to do this for reduction of
166 the energy consumption (39), or to work towards renewable NH_3 . Nevertheless, NSF has called for
167 improved catalysts for the H.-B. catalysts to reduce the energy demand for synthetic NH_3 in two requests
168 for proposals (22, 40) although obtaining H_2 clearly consumes the vast majority of the energy for NH_3 .

169 **Research related to Haber-Bosch**

170 A number of approaches are under investigation to replace (41,42,43,44,45,46) or improve the H.-B.
171 process. Research on improvement has focused on new catalysts (see above) and scientific advances
172 including a recent Nobel Prize closely related to H.-B. catalysis (47). Current industrial catalysts are
173 already highly optimized and last for many years, while little further practical impact is possible due to
174 limitations that cannot be addressed by catalysts (39, also discussion above). Citing Carl Bosch, in 1932,
175 on the importance of further improvements to the catalytic H.-B. loop compared to the cost of obtaining
176 hydrogen feedstock, "... the conversion of the ready-made gas mixture into ammonia is only a minor cost
177 factor"(30). More than 80 years later, this still holds true.

178 As an example of proposed alternative processes to replace H.-B., one recent approach is the use of a
179 "cold" plasma to produce ammonia from hydrogen and nitrogen (48). The "hot" plasma approach using
180 an electrical discharge has been implemented at full scale early in the 20th century and was quickly
181 discarded due to the exceptionally high energy demand compared to H.-B. (49). Using the data from the
182 above reference, cold plasma would require about 40,000 MW for a 1000 tonne NH₃ per day production
183 level, while industrial-scale state of the art H.-B. requires about 360 MW. The energy demand of cold
184 plasma for ammonia synthesis appears clearly prohibitive.

185 Electrochemical approaches to replace H.-B. are also being proposed and explored at the laboratory
186 level. Using published data as an example (41) the electrochemical approach would require more than
187 twice the energy per tonne of NH₃ produced compared to H.-B., assuming no loss of energy efficiency
188 from extremely well controlled laboratory conditions to full industrial scale with realistic feedstock and
189 chemicals.

190 Ammonia synthesis based on nitrides and solar energy has been estimated to be competitive to
191 existing state of the art H.-B. facilities (50). The advantages of the process, however, relate more to
192 operation near ambient pressure vs. several hundred atmospheres for H.-B., and the use of rugged bulk
193 chemical conversions instead of the sensitive H.-B. heterogeneous catalysts.

194 Below it is shown that renewable H.-B. NH₃, based on available full-scale electrolysis technology to
195 produce hydrogen and cryogenic air separation to produce nitrogen, is now becoming economically
196 attractive due to the exceptional decrease in the cost of renewable electricity (38). The basic approach is
197 to take full advantage of the highly optimized H.-B. process and existing installed capital, with a bolt-on
198 solution to provide syngas.

199 **Realistic opportunities for Haber-Bosch alternatives**

200 A need for new simple, rugged, and down-scaleable processes exists where H.-B. is not economical
201 or practical: small scale, with operation on intermittent renewable electricity, in less developed countries
202 without an existing NH₃ industry or reliable infrastructure, and where upsets may be more frequent.

203 From an economical perspective, commodities such as NH₃ produced in capital-intensive facilities at
204 large volumes with modest profit per unit, suffer from significant barriers to entry for proposed novel
205 greenfield processes. This is especially true in markets such as the U.S., Europe, China, or the Middle
206 East where a large base of installed, conventional H.-B. capital is present and growing, and will operate
207 for decades to come absent regulatory intervention. Taking advantage of the installed capital base of H.-
208 B. ammonia facilities, with about 29 facilities in the U.S. alone (1), retrofitting would lower the barriers
209 for renewable ammonia to enter the market. This approach is taken below.

Results and Discussion

211 The basis for the proposed renewable ammonia process evaluated herein is 1000 tonnes of anhydrous
212 ammonia produced per day (1000 tpd), a representative size of a commercial unit (Figure 2). Renewable
213 hydrogen can be derived from water by solar thermal processes (51). However, electrolysis of water for
214 hydrogen production is commercially available at scale and is therefore assumed here as the hydrogen
215 source for ammonia synthesis from renewable electricity.

216 The overall premise is to retain the existing H.-B. synthesis loop to make use of installed capital
217 investments. The hydrogen and nitrogen generation from natural gas (steam reforming/watergas shift,
218 state of the art Haber-Bosch plants) is replaced with electrolytic hydrogen, and cryogenic nitrogen is
219 made using renewable electricity. This replacement could also be done step-wise in form of incremental
220 capacity, or debottlenecking if steam reforming of natural gas limits capacity.

221 The methodology applied here concentrates on the energy input to produce a unit of anhydrous
222 ammonia. This is quite simple when electrical energy is used to produce syngas by electrolysis of water,
223 and cryogenic air separation, respectively, especially since energy for the H.-B. synthesis loop is
224 essentially negligible. The feedstock is either available at no cost (air), or at marginal energy input (water
225 purification, see below). The reference case for natural gas-based state of the art NH_3 production
226 intertwines energy and chemical feedstock somewhat since some hydrogen is derived from water (steam),
227 and some from natural gas that also supplies energy. The operating cost, however, can be compared
228 through the price per unit of energy, either as natural gas or as electricity. This is done below.

229 Hydrogen and nitrogen production


230 In the proposed system, renewable NH_3 is produced by electrolyzing water to obtain highly pure
231 hydrogen (alkaline electrolysis or proton-exchange membrane electrolysis, assumed at 54 kWh per kg H_2
232 delivered at 30 bar (52,53)). Electrolytic hydrogen has the added advantage of not containing catalyst
233 poisons (especially sulfurous compounds), compared to using natural gas. Purified nitrogen is produced
234 by a cryogenic air separation unit (243 kWh per tonne N_2 delivered at 285K, 40 bar (54)). A conventional
235 oxygen-removal step (not shown) to purify the cryogenic nitrogen is needed due to the great oxygen
236 sensitivity of H.-B. catalysts.

237 Synthesis loop compressor

238 A single multi-stage centrifugal syngas compressor used in state of the art existing H.-B. synthesis
239 loops is typically driven by a steam turbine and requires about 10 MW to compress the synthesis gas for
240 the assumed 1000 tpd NH_3 production (55). Steam is conventionally derived from the natural gas steam
241 reforming process, and from cooling the H.-B. reactors. The conceptual cryogenic air separation and

241 electrolysis assumed here do not produce significant amounts of steam to drive the compressor.
 242 However, up to 31 MW of heat of reaction is still available as high-pressure steam from required cooling
 243 of the Haber-Bosch synthesis reactors (3, 56). Estimating 30% efficiency for the use of the high-pressure
 244 steam in the syngas compressor, the available steam would nominally suffice to drive the syngas
 245 compressor. An amount of renewable energy may be needed to raise additional steam for the compressor,
 246 but even an electrical drive would have marginal impact compared to the energy for H₂ generation.
 247

248 As their relative contributions are small, energy for the following is neglected: gas recycling inside of
 249 the Haber-Bosch synthesis loop, and motive force to transport various gases and liquids.

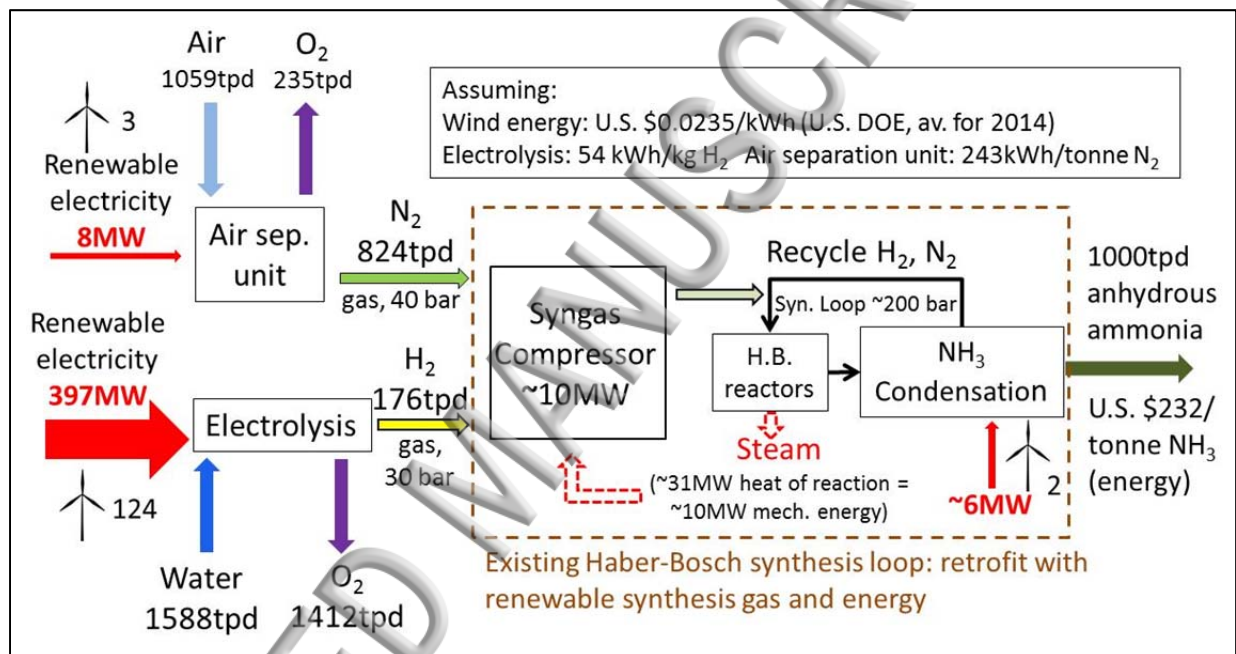

250
 251 **Figure 3** Hydrogen generation governs the energy demand for the synthesis of 1000 tonnes per day (tpd)
 252 of renewable ammonia in a "bolt-on" concept. Renewable cryogenic N₂ and renewable H₂ from water
 253 electrolysis are fed to an existing Haber-Bosch synthesis loop. Electrolysis is assumed at 54 kWh/kg H₂.
 254 Cryogenic N₂ is assumed at 243 kWh per tonne N₂. Wind turbines are assumed operating at 3 MW each
 255 for a simple illustration, disregarding the capacity factor.

256 **Detailed discussion of costs**

257 Hydrogen production by electrolysis consumes 94% of the renewable electricity required according to
 258 Figure 3. The U.S. nationwide average electricity price to industrial customers in 2014 was \$0.071 per
 259 kWh (57). Renewable energy prices have declined precipitously, with an average of \$0.0235 per kWh for
 260 power-purchase agreements from wind energy reported for 2014 in the U.S.(58) If a total of 411 MW is
 261 required (Figure 3) for the benchmark 1000 tpd ammonia production, then the energy cost for renewable
 262 electricity would be \$232 per tonne of ammonia produced. No significant amount of fossil fuel would be
 263 needed.

264 Transportation costs in the U.S. are negligible compared to the cost of producing NH_3 (59,60). Feed
265 water for the electrolysis can be produced from seawater (worst-case / highest-cost scenario) by reverse
266 osmosis for \$1.20 per tonne of ammonia including maintenance and capital expense charges (61), at about
267 3 kWh per cubic meter of water produced, resulting in a total cost of \$233 per tonne of anhydrous
268 renewable NH_3 . Seventy to eighty-five percent of ammonia production cash cost resides in the cost of
269 energy (62), with the U.S. at the top of this range (energy as natural gas, for the state-of-the-art H.-B.
270 process). Taking this in account, it can be estimated that cash costs would be \$251 per tonne of
271 anhydrous renewable ammonia based on electricity from wind. The market price of ammonia is quite
272 variable but for comparison, the minimum price of ammonia was reported at \$499/tonne for the time
273 period of 2008-2016 (37).

274 Any credit for eliminating the current minimum of about 1.5 tonnes of CO_2 emissions per tonne of
275 ammonia produced would improve fossil-free ammonia economics. Further improvement would result if
276 the high-purity oxygen by-product could be used, perhaps for oxygen-blown fossil fuel combustion to
277 enable carbon capture/sequestration, or for other purposes such as steel making or bleaching for the pulp
278 and paper industries.

279 **Comparison to previous work on electrolysis based ammonia**

280 The calculations above are verified against earlier work by Grundt et al. at Norsk Hydro a. s. (63).
281 Grundt et al. reported an overall energy demand of 416MW for 1000 tpd for a Haber-Bosch ammonia
282 plant design using water electrolysis and air separation. This resulted in energy costs of U.S. \$217 per
283 tonne of ammonia produced, using today's \$0.0235 per kWh, nearly identical to the result above.
284 Elsewhere (64), Dubey evaluated a technically similar but energy-island-based scenario for small-scale,
285 wind- and electrolysis based H.-B. NH_3 (77 tonnes per day or less). This included hydrogen storage to
286 continuously generate electricity using generators (for air separation etc.), and NH_3 when wind would be
287 not available. Simply extrapolating Dubey's small-scale data to the benchmark 1000tpd results in about
288 twice the electrical energy demand compared to Grundt et al. and the calculations above. This difference
289 is mainly due to the added H_2 storage/usage, and the less efficient small-scale cryogenic nitrogen-
290 generation system.

291 Grundt et al. estimated capital expenses of U.S. \$200 million (corrected to 2016 dollars) for a 1000-
292 tpd ammonia facility (H.-B. synthesis loop, water electrolysis, and cryogenic air separation). Applying
293 the six-tenths rule of plant design, a 2000tpd facility would have estimated capital costs of \$329 million.
294 Capital investment for conventional H.-B. facilities are essentially equivalent at U.S. \$312 million for
295 2000-tpd capacity (natural gas-based, state-of-the-art, greenfield H.-B. facility (65)). Thus, even for a
296 greenfield facility, renewable ammonia capital costs are competitive with natural gas-based ammonia.

297 Gundt et al.'s capital investment figure will obviously be significantly reduced if an existing Haber-
298 Bosch synthesis loop is retrofitted with renewable syngas production.

299 **Avenues to renewable ammonia:**

300 The very significant existing capital investments in natural gas- or coal-based ammonia synthesis via
301 H.-B. in countries such as China and the U.S. causes an amount of inertia to technological change that is
302 hard to overcome. The "bolt-on" conversion or partial conversion to hydrogen and nitrogen from water
303 and air based on renewable electricity, however, can perhaps overcome this inertia through strong
304 payback as demonstrated here, or perhaps by marketing renewable fertilizer or NH_3 that may be attractive
305 even at a premium for organic food production or energy storage/transportation (26).

306 The capital investment inertia in Africa is much lower since little ammonia is used or synthesized on
307 the continent, relative to the current and future population. However, the technical complexity, economic
308 barriers to down-scaling, and capital intensity of state-of-the-art H.-B. facilities makes the process less
309 compatible with the economic, technological, and infrastructure realities in Africa. Research for NH_3
310 synthesis completely different from H.-B. should address enabling factors of future markets like Africa:
311 economical down-scaling to regional or local scale to avoid the need for transport networks, robustness
312 and resilience to upsets or utility interruptions, intermittent operability from intermittent renewable
313 resources, and technological simplicity.

314 **3 Conclusions**

315 The precipitous decline in the cost of renewable electricity renders electrolysis of water and cryogenic
316 nitrogen from air a feedstock supply route for Haber-Bosch ammonia synthesis gas that is increasingly
317 competitive with natural gas-based Haber-Bosch ammonia. Using available industrial-scale technology,
318 the energy demand for a process based on electrical energy to provide hydrogen and nitrogen is about
319 14% higher than for the conventional natural gas based process. Existing Haber-Bosch synthesis loops in
320 ammonia synthesis facilities in the U.S. and worldwide could be incrementally or completely retrofitted.
321 Developing retrofit technology would perhaps also be useful for the Chinese market for the future (66).
322 There is now a clear, economically attractive and relatively rapid path to decouple ammonia synthesis as a
323 major energy component of food production from fossil fuel, especially where renewable electricity
324 already is increasingly inexpensive, such as in the U.S. and Europe.

325 Research into Haber-Bosch catalysts or replacements for those catalysts will have little to no impact
326 on the energy demand or fossil fuel footprint of ammonia synthesis since hydrogen production consumes
327 the Lyon's share of energy. Even a hypothetical catalyst allowing room temperature operation at

atmospheric pressure with superior performance compared to existing Haber-Bosch catalysts will have
329 essentially no impact on the energy footprint.

330 Research into fundamental alternatives to the Haber-Bosch process should therefore concentrate on
331 conditions in future markets such as Africa where farmers use little fertilizer, ammonia production is at a
332 low level, and future population growth and increase in food demand is expected to be the most
333 significant. Issues such as economical down-scaling, reduced complexity by atmospheric pressure
334 operation, lower capital expense, tolerance to upsets, and ease of intermittent operability would enable
335 future greenfield ammonia production in Africa.

336 Acknowledgments

337 This material is partially based upon work supported by the National Science Foundation Grant,
338 "From Crops to Commuting: Integrating the Social, Technological, and Agricultural Aspects of
339 Renewable and Sustainable Biorefining (I-STAR)," NSF Award No.: DGE-0903701.

340 This material is partially based upon work supported by the U.S. Department of Energy, Office of
341 Science, Office of Basic Energy Sciences, EPSCoR, under Award Number DESC0016453

342 Funding by the Center for Sustainable Energy, Kansas State University, is gratefully acknowledged.

343 References

- 1 U.S. Geological Survey, Mineral commodity summaries, 112-113, 2014
- 2 E. Worrell, D. Phylipsen, D. Einstein, N. Martin, "Energy Use and Energy Intensity of the U.S. Chemical Industry" (Lawrence Berkeley National Laboratory, LBNL-44314, 2000);
https://www.energystar.gov/ia/business/industry/industrial_LBNL-44314.pdf
- 3 Uhde, "Ammonia," (Company brochure);
http://www.thyssenkrupp-industrial-solutions.com/fileadmin/documents/brochures/uhde_brochures_pdf_en_5.pdf
- 4 European Fertilizer Manufacturers' Association, "Best Available Techniques for Pollution Prevention and Control in the European Fertilizer Industry" (Booklet No. 1 of 8: Production of

Ammonia,2000);

http://www.fertilizerseurope.com/fileadmin/user_upload/user_upload_prodstew/documents/Booklet_nr_1_Production_of_Ammonia.pdf

5 International Fertilizer Industry Association, Production and International Trade Committee, "Ammonia Feedstock Evolution" (2013)

http://www.fssa.org.za/Journals/2014/deSousa_slides.pdf

6 IPCC Fourth Assessment Report: Climate Change, 2007, p. 4

https://www.ipcc.ch/pdf/assessment-report/ar4/wg3/ar4_wg3_full_report.pdf

7 "World Population to 2300" (United Nations Department of Economic and Social Affairs, United Nations, New York, 2004).

8 T. Wheeler, J. von Braun, Climate change impacts on global food security. *Science* **341**(6145), 508-513 (2013).

9 J. Bruinsma, "The resources outlook: by how much do land, water and crop yield need to increase by 2050?", in: *Looking Ahead in World Food and Agriculture*, P. Conforti, Ed., Food and Agriculture Organization of the United Nations (2011);

<http://www.fao.org/docrep/014/i2280e/i2280e00.pdf>

10 B. A. Stout, *Handbook of Energy for World Agriculture* (Elsevier, New York, 1989).

11 W. M. Stewart, A. E. Dobb, A. E. Johnston, T. J. Smyth, The Contribution of Commercial Fertilizer Nutrients to Food Production. *Agronomy Journal* **97**(1), 1-6 (2005).

12 A. Lerna, G. Pandino, S. Lombardo, G. Mauromicale, Tuber yield, water and fertilizer productivity in early potato as affected by a combination of irrigation and fertilization.

Agricultural Water Management **101**(2011), 35-41.

13 I. Kisekka, F. Lamm, J. D. Holman, "Response of Drought-Tolerant and Conventional Corn to Limited Irrigation," (Kansas Agricultural Experiment Station Research Report, Volume 1, Issue 5, Article 21, 2015);

<http://newprairiepress.org/cgi/viewcontent.cgi?article=1088&context=kaesrr>

14 C. Hedley, The role of precision agriculture for improved nutrient management of farms.

Journal of the Science of Food and Agriculture, **95**(1), 12-19 (2015)

15 Y. P. Timilsena, R. Adhikari, P. Casey, T. Muster, H. Gill, B. Adhukari, Enhanced efficiency fertilisers: a review of formulation and nutrient release patterns. *Journal of the Science of Food and Agriculture*, **95**(6), 1131-1142 (2015).

16 V. Smil, *Enriching the Earth: Fritz Haber, Carl Bosch, and the Transformation of World Food Production* (MIT Press, Cambridge, MA, 2004).

17 USDA ERS, Manure Use for Fertilizer and for Energy, Report to Congress United States Department of Agriculture, June 2009

18 Y. Luo, B. Su, W. S. Currie, J. S. Dukes, A. Finzi, U. Hartwig, B. Hungate, R. E. McMurtrie, R. Oren, W. J. Parton, D. E. Pataki, R. M. Shaw, D. R. Zak, C. B. Field, Progressive Nitrogen Limitation of Ecosystem Responses to Rising Atmospheric Carbon Dioxide. *Bio Science*, **54**(8), 731-739 (2004).

19 I. S. F. Jones, The cost of carbon management using ocean nourishment. *International Journal of Climate Change Strategies and Management*, **6**(4), 391-400 (2014).

20 T. Lipman, N. Shah, "Ammonia As an Alternative Energy Storage Medium for Hydrogen Fuel Cells" (Final Report Caltrans/UC Berkeley Contract #22A0418, Task Order 1, U.C. Berkeley Transportation Sustainability Research Center, 2007); <http://escholarship.org/uc/item/7z69v4wp>

21 "ARPA-E Announces \$30 Million in Funding for New Technologies to Produce Renewable Liquid Fuels", (Arpa-E Press and Public Affairs, 2016); <http://arpa-e.energy.gov/?q=news-item/arpa-e-announces-30-million-funding-new-technologies-produce-renewable-liquid-fuels>

22 Innovations at the Nexus of Food, Energy and Water Systems (INFEWS), (U.S. National Science Foundation, 2016); <http://www.nsf.gov/pubs/2016/nsf16524/nsf16524.htm>

23 114th Congress of the United States, Report 114-54 to accompany H.R. 2028, p. 90, 2015

24 J. Norskov, J. Chen, (Co-Chairs), "Sustainable Ammonia Synthesis" (DOE Roundtable Report, 2-2016); http://science.energy.gov/~media/bes/csgb/pdf/docs/2016/NH3_Report

25 Sustainable Ammonia Synthesis (U. S. Department of Energy Office of Science Basic Energy Sciences, DE-FOA-0001569 and 1572, 2016);

http://science.energy.gov/~media/grants/pdf/foas/2016/SC_FOA_0001569.pdf

26 D. Howell, "Revolutionary disruption coming to the energy sector, The Japan Times, March 10, 2017.

<http://www.japantimes.co.jp/opinion/2017/03/10/commentary/world-commentary/revolutionary-disruption-coming-energy-sector#.WO-VqYN3Hmg>

27 "Green" Ammonia is the key to meeting the twin challenges of the 21st century, Siemens
United Kingdom

<http://www.siemens.co.uk/en/insights/potential-of-green-ammonia-as-fertiliser-and-electricity-storage.htm>

28 "Dutch gas plants made fossil-free?", Vattenfall, March 2016

<http://news.vattenfall.com/en/article/dutch-gas-plants-made-fossil-free>

29 F. Haber, The synthesis of ammonia from its elements, Nobel lecture, June 3, 1920.

30 C. Bosch, The development of the chemical high-pressure method during the establishment of the new ammonia industry, Nobel lecture, May 21, 1932.

31 A. Mittasch, "*Geschichte der Ammoniak-Synthese*" (Verlag Chemie, Weinheim, 1957).

32 M. Appl, "Ammonia", in: Ullmann's Encyclopedia of Industrial Chemistry (Wiley VCH, 2006)

33 T. Eggemann, "Ammonia", in: Kirk-Othmer Encyclopedia of Chemical Technology (John Wiley and Sons, 2010)

34 J. W. Geus, K. C. Waugh, Ammonia Synthesis Commercial Practice. In: J. R. Jennings (ed.), Catalytic Ammonia Synthesis, Fundamentals and Practice. Plenum Press, New York, 1991, 253-283.

35 M. Appl, "*Ammonia: principles and industrial practice*" (Wiley VCH Verlag GmbH, Weinheim, 1999) p. 146.

- 36 A. Boulamanti, J. A. Moya, Production costs of the chemical industry in the EU and other countries: Ammonia, methanol, and light olefins. *Renewable and Sustainable Energy Reviews* (2016), <http://dx.doi.org/10.1016/j.rser.2016.02.021>
- 37 G. Schnitkey, Anhydrous Ammonia, Corn, and Natural Gas Prices Over Time, Farmdoc Daily (6)112, University of Illinois at Urbana-Champaign, June 14 2016
- 38 L. Tillemann, "Revolution Now – The Future Arrives for Four Clean Energy Technologies" (U.S. Department of Energy, September 17, 2013);
<http://energy.gov/sites/prod/files/2013/09/f2/200130917-revolution-now.pdf>
- 39 R. Schlögl, Catalytic synthesis of ammonia – a "never ending story?". *Angew. Chem. Int. Ed.* 42(18), 2004-2008 (2003).
- 40 NSF 17-013, Dear Colleague Letter: FY 2017 Innovations at the Nexus of Food, Energy and Water Systems (INFEWS) Funding Opportunity on Nitrogen, Phosphorus, and Water
<https://www.nsf.gov/pubs/2017/nsf17013/nsf17013.jsp>
- 41 S. Licht, B. Cui, B. Wang, F.-F. Li, J. Lau, S. Liu, Ammonia synthesis by N₂ and steam electrolysis in molten hydroxide suspensions of nanoscale Fe₂O₃. *Science* **345**(2014), 637-640.
- 42 Skodra, A., Stoukides, M., Electrocatalytic synthesis of ammonia from steam and nitrogen at atmospheric pressure". *Solid State Ionics* **180**(2009), 1332-1336.
- 43 J. A. Pool, E. Lobkovsky, P. J. Chirik, Hydrogenation and cleavage of dinitrogen to ammonia with a zirconium complex. *Nature* **427**(2004), 527-530.
- 44 D. V. Yandulov, R. R. Schrock, Catalytic reduction of dinitrogen to ammonia at a single

molybdenum center. *Science* **301**(2003), 76-78.

45 R. Michalsky, P. H. Pfromm, An Ionicity Rationale to Design Solid-Phase Metal-Nitride Reactants for Solar Ammonia Production. *J. Phys. Chem. C.* **116**(44), 23243-2325 (2012).

46 R. Michalsky, A. M. Avram, B. A. Peterson, P. H. Pfromm, A. A. Peterson, Chemical looping of metal-nitride catalysts: low-pressure ammonia synthesis for energy storage. *Chemical Science* **6**(2015), 3965-3974.

47 G. Ertl, Reactions at surfaces: from atoms to complexity, Nobel lecture, December 8, 2007.

48 P. Peng , Y. Li, Y. Cheng, S. Deng, P. Chen, R. Ruan, "Atmospheric Pressure Ammonia Synthesis Using Non-thermal Plasma Assisted Catalysis", *Plasma Chemistry and Plasma Processing*, **36**(5), 1201-1210 (2016).

49 A. S. Travis, "*The Synthetic Nitrogen Industry in World War I – its emergence and expansion*" (Springer Verlag, New York, 2015).

50 R. Michalsky, B. J. Parman, V. Amanor-Boadu, P. H. Pfromm, Solar thermochemical production of ammonia from water, air and sunlight: thermodynamic and economic analyses. *Energy*, **42**(1), 251-260 (2012).

51 A. Steinfeld, Solar thermochemical production of hydrogen – a review. *Solar Energy* **78**(5), 603-615 (2005).

52 L. Bertuccioli, A. Chan, D. Hart, F. Lehner, B. Madden, E. Standen, "Study of development of water electrolysis in the European Union" (Final Report, Fuel Cells and Hydrogen Joint Undertaking, February 2014)

;http://www.fch.europa.eu/sites/default/files/study%20electrolyser_0-Logos_0_0.pdf

53 J. Genovese, K. Hark, M. Pater, J. Turner, "Current (2009) State-of-the-Art Hydrogen Production Cost Estimate Using Water Electrolysis" (U.S. Department of Energy National Renewable Energy Laboratory, Report NREL/BK-6A1-46676, 2009);
<http://www.osti.gov/bridge>

54 European Industrial Gases Association, "Indirect CO₂ Emissions Compensation: Benchmark Proposal for Air Separation Plants" (Position Paper PP-33, 2010);
https://www.eiga.eu/fileadmin/docs_pubs/PP-33-

[Indirect_CO2_emissions_compensation_Benchmark_proposal_for_Air_Separation_Plants.pdf](https://www.eiga.eu/fileadmin/docs_pubs/PP-33-Indirect_CO2_emissions_compensation_Benchmark_proposal_for_Air_Separation_Plants.pdf)

55 C. W. Hooper, Ammonia Synthesis: commercial Practice, in: J. R. Jennings (ed.) Catalytic Ammonia Synthesis, Plenum Press, NY, 1991, p. 265 (1991)

56 Appl, M., The Haber-Bosch Heritage: The Ammonia Production Technology. 50th Anniversary of the IFA Technical Conference, September 25–26 1997, Sevilla, Spain.

57 U.S. Energy Information Administration, "Electricity-Electrical Power Annual" (2016);
http://www.eia.gov/electricity/annual/html/epa_02_10.html

58 "Revolution... Now The Future Arrives for Five Clean Energy Technologies – 2015 Update" (Report, U.S. Department of Energy, November 2015);
<http://energy.gov/sites/prod/files/2015/11/f27/Revolution-Now-11132015.pdf>

59 J. R. Bartels, M. P. Pate, "A feasibility study of implementing an ammonia economy" (Final Report, Iowa Energy Center Project Grant Number: 07S-01, 2008);
http://www.iowaenergycenter.org/wp-content/uploads/2012/03/Bartels_07S-01.pdf

60 T. Eggemann, "Ammonia", in: Kirk-Othmer Encyclopedia of Chemical Technology (John Wiley and Sons, 2010)

61 Y. Zhou, Y., R. S. J. Tol, Evaluating the Costs of Desalination and Water Transport. *Water Resources Res.* **41**(2005), W03003.

62 PotashCorp, "Nitrogen Overview," (2014).

<http://www.potashcorp.com/overview/nutrients/nitrogen/overview/nitrogen-production-cash-costs>

63 T. Grundt, K. Christiansen, Hydrogen by water electrolysis as basis for small-scale ammonia production. A comparison with hydrocarbon-based technologies. *International Journal of Hydrogen Energy*, **7**(3), 247-257 (1982).

64 M. B. Dubey, "Conversion and storage of wind energy as nitrogenous fertilizer" (Final Report, The National Science Foundation, Contract NSF C75-22186, 1977).



65 D. Lippmann, D., Larsen, J., "Uhde dual-pressure process for large-scale ammonia plants" (Thyssenkrupp techforum, 56-61, July 2004);

https://www.thyssenkrupp.com/documents/Publikationen/Techforum/techforum_e_7_2004.pdf

66 B. Spiegele, China's State Grid Envisions Global Wind-and-Sun Power Network. *The Wall Street Journal*, March 30, 2016

<http://www.wsj.com/articles/chinas-state-grid-envisions-global-wind-and-sun-power-network-1459348941>

Syngas production
(nat. gas for heating neglected,
units: mol)



Ammonia
synthesis

