



(19) **United States**  
(12) **Patent Application Publication**  
**McGuire**

(10) **Pub. No.: US 2014/0301519 A1**  
(43) **Pub. Date: Oct. 9, 2014**

(54) **HEATING PLASMA FOR FUSION POWER USING MAGNETIC FIELD OSCILLATION**

Apr. 3, 2013, provisional application No. 61/808,101, filed on Apr. 3, 2013, provisional application No. 61/808,154, filed on Apr. 3, 2013.

(71) Applicant: **Thomas John McGuire**, Palmdale, CA (US)

(72) Inventor: **Thomas John McGuire**, Palmdale, CA (US)

(21) Appl. No.: **14/243,447**

(22) Filed: **Apr. 2, 2014**

**Publication Classification**


(51) **Int. Cl.**  
**G21B 1/05** (2006.01)  
(52) **U.S. Cl.**  
CPC ..... **G21B 1/05** (2013.01)  
USPC ..... **376/142**





**Related U.S. Application Data**

(60) Provisional application No. 61/807,932, filed on Apr. 3, 2013, provisional application No. 61/808,136, filed on Apr. 3, 2013, provisional application No. 61/808,122, filed on Apr. 3, 2013, provisional application No. 61/808,131, filed on Apr. 3, 2013, provisional application No. 61/808,110, filed on Apr. 3, 2013, provisional application No. 61/808,066, filed on Apr. 3, 2013, provisional application No. 61/808,093, filed on Apr. 3, 2013, provisional application No. 61/808,089, filed on

(57) **ABSTRACT**

In one embodiment, a fusion reactor includes two internal magnetic coils suspended within an enclosure, a center magnetic coil coaxial with the two internal magnetic coils and located proximate to a midpoint of the enclosure, a plurality of encapsulating magnetic coils coaxial with the internal magnetic coils, and two mirror magnetic coil coaxial with the internal magnetic coils. The fusion reactor is configured to vary electrical currents supplied to the magnetic coils to heat the plasma confined within the magnetic wall.

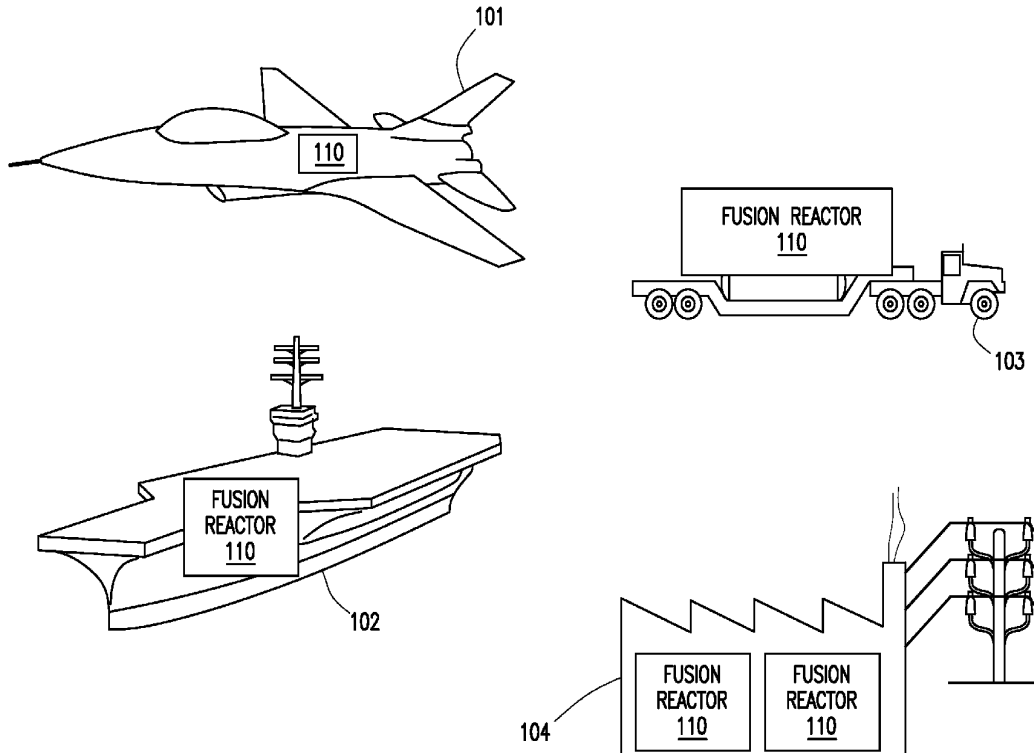

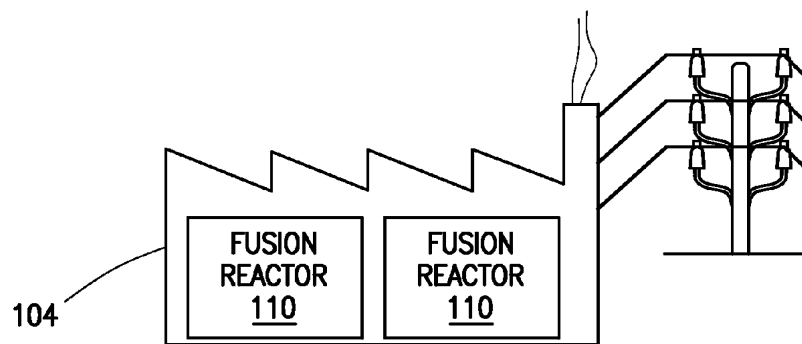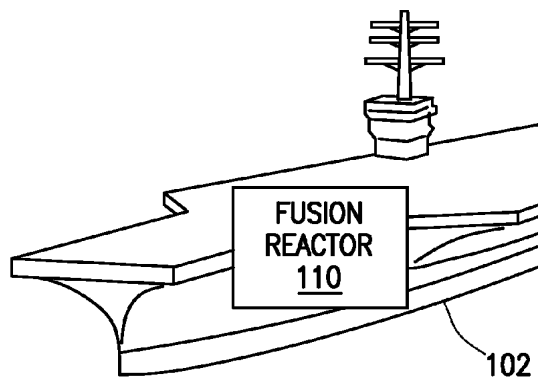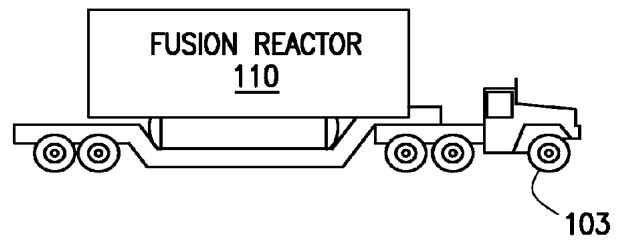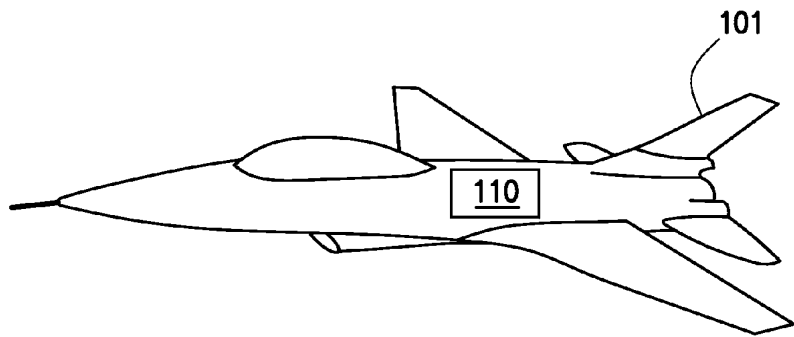

*FIG. 1*

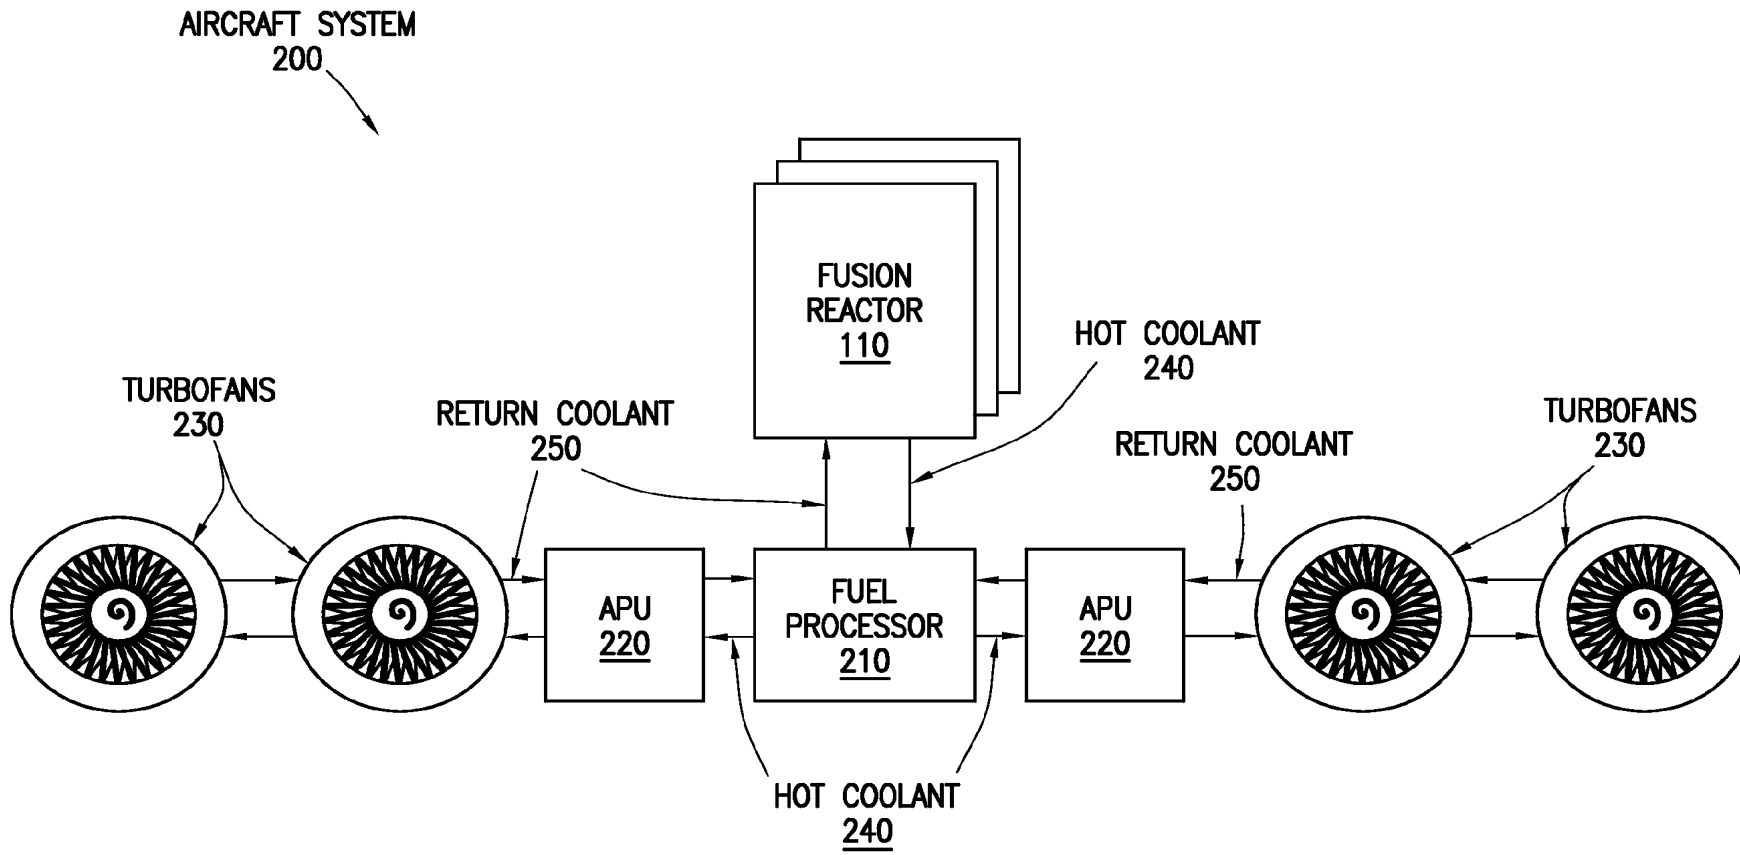


FIG. 2

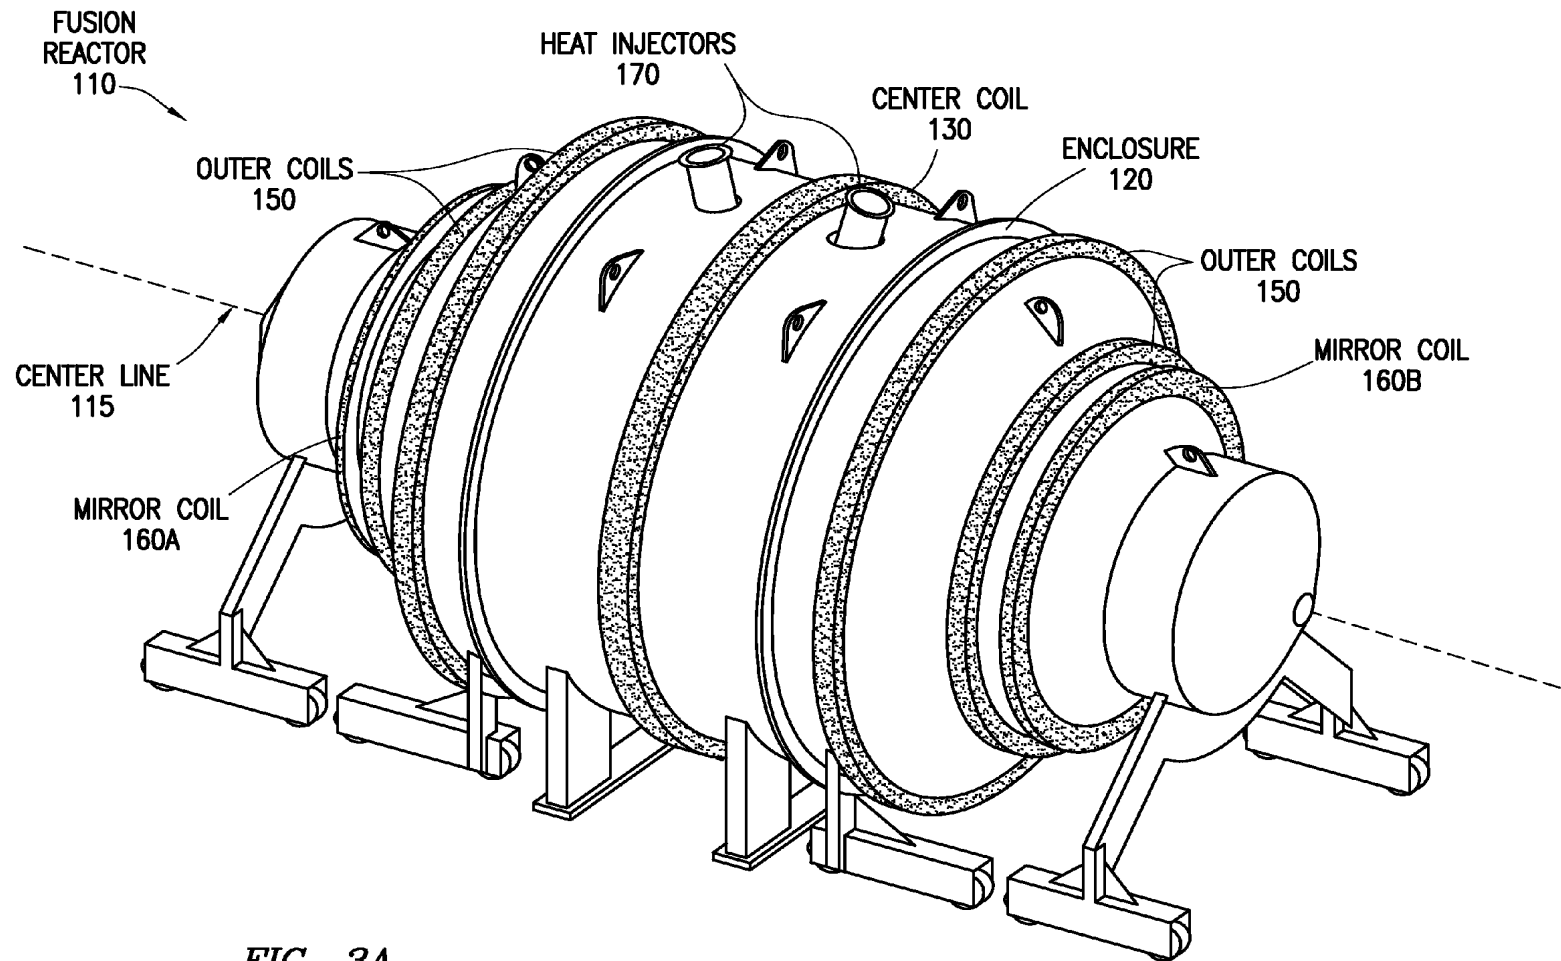


FIG. 3A

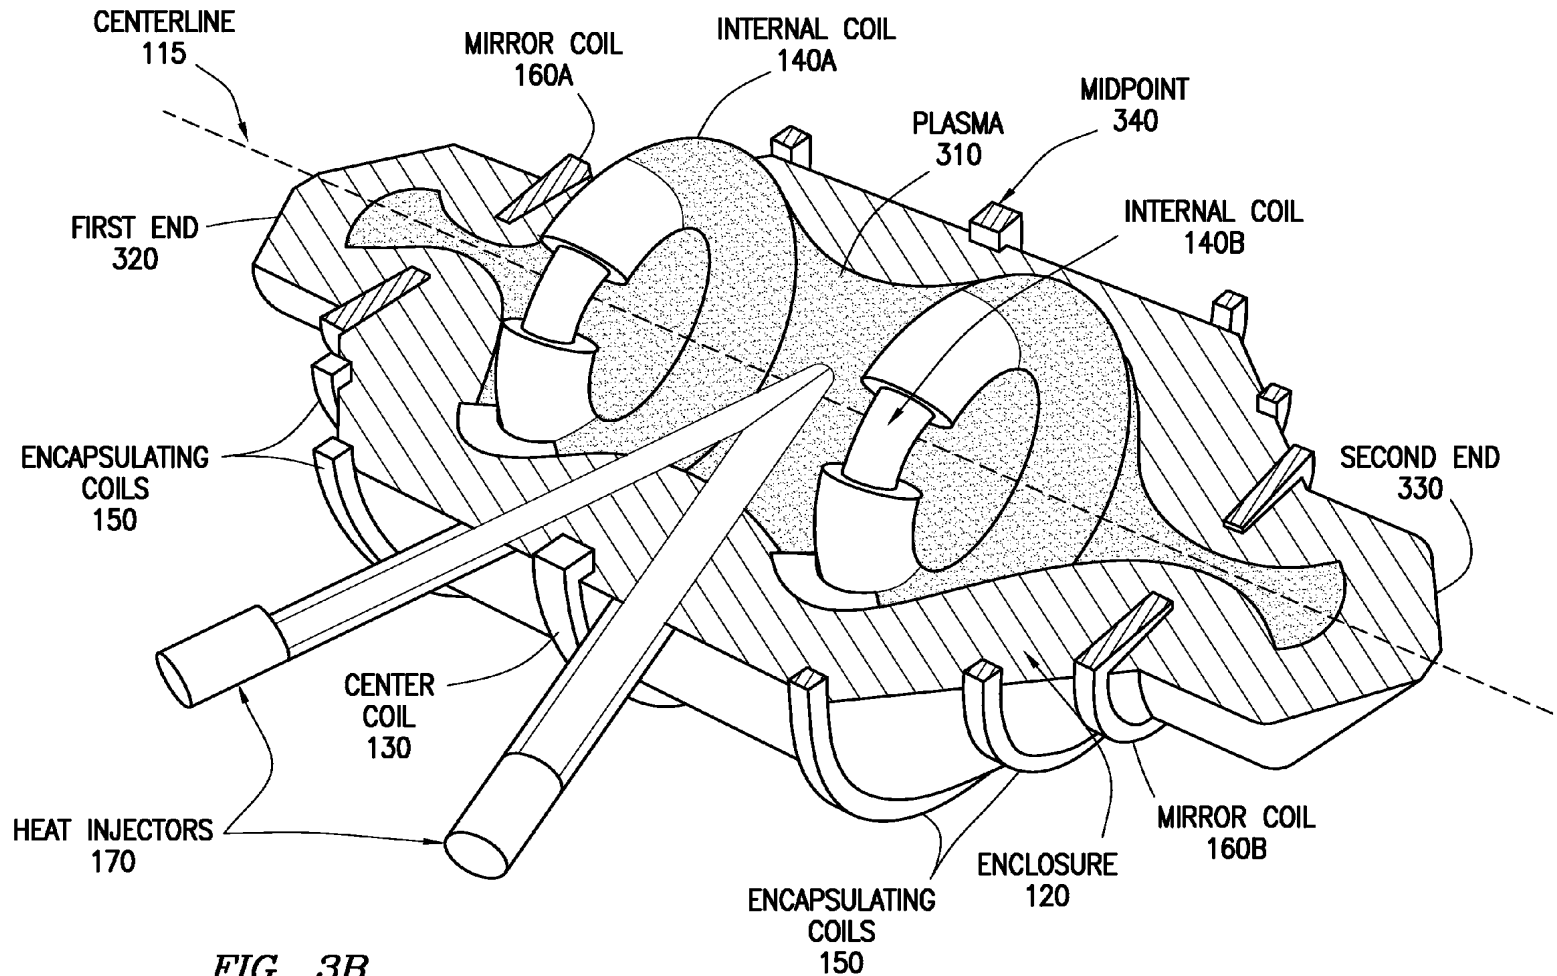


FIG. 3B

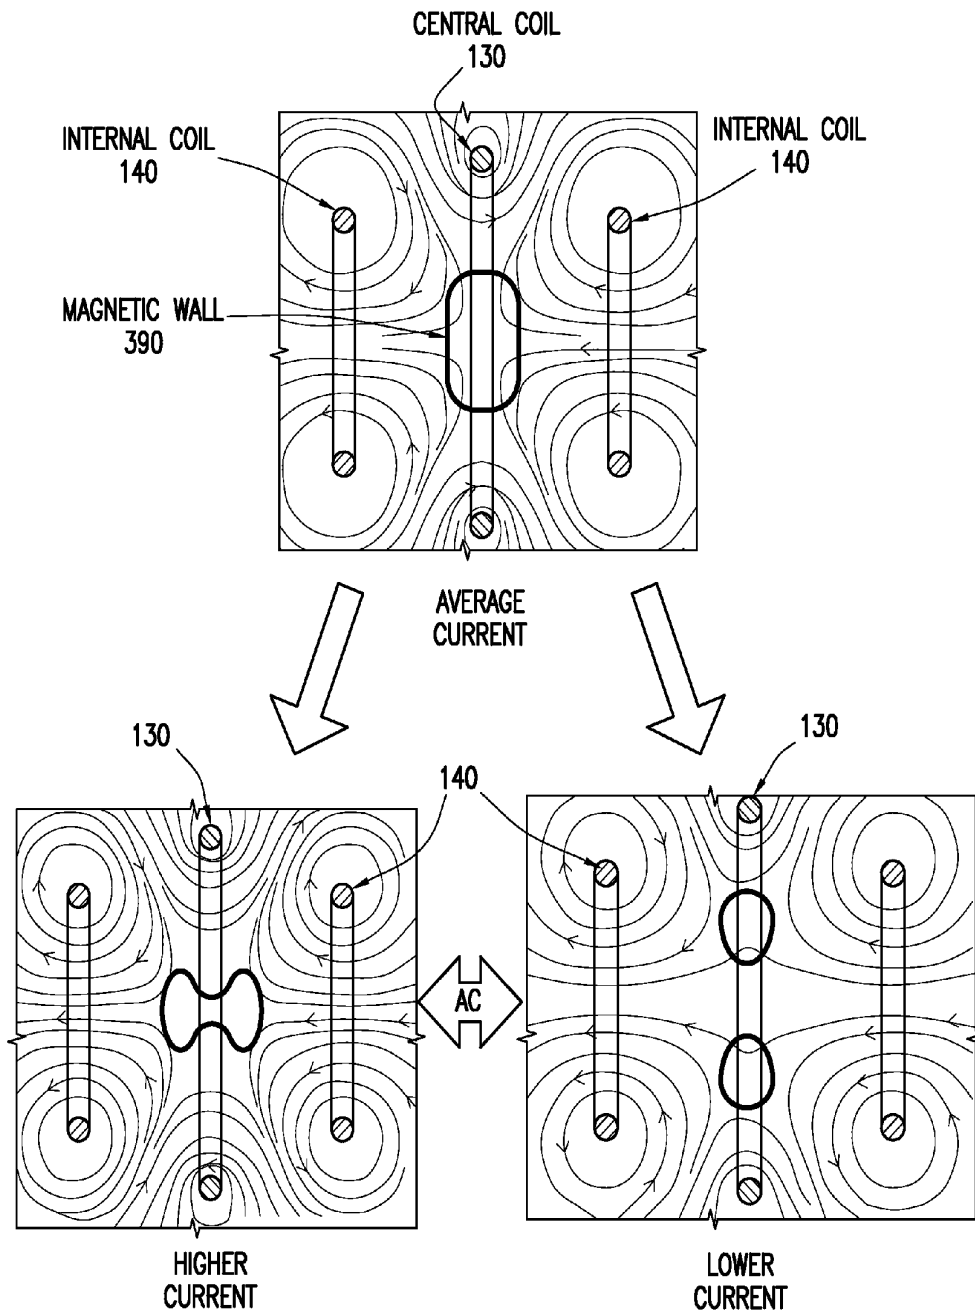


FIG. 3C

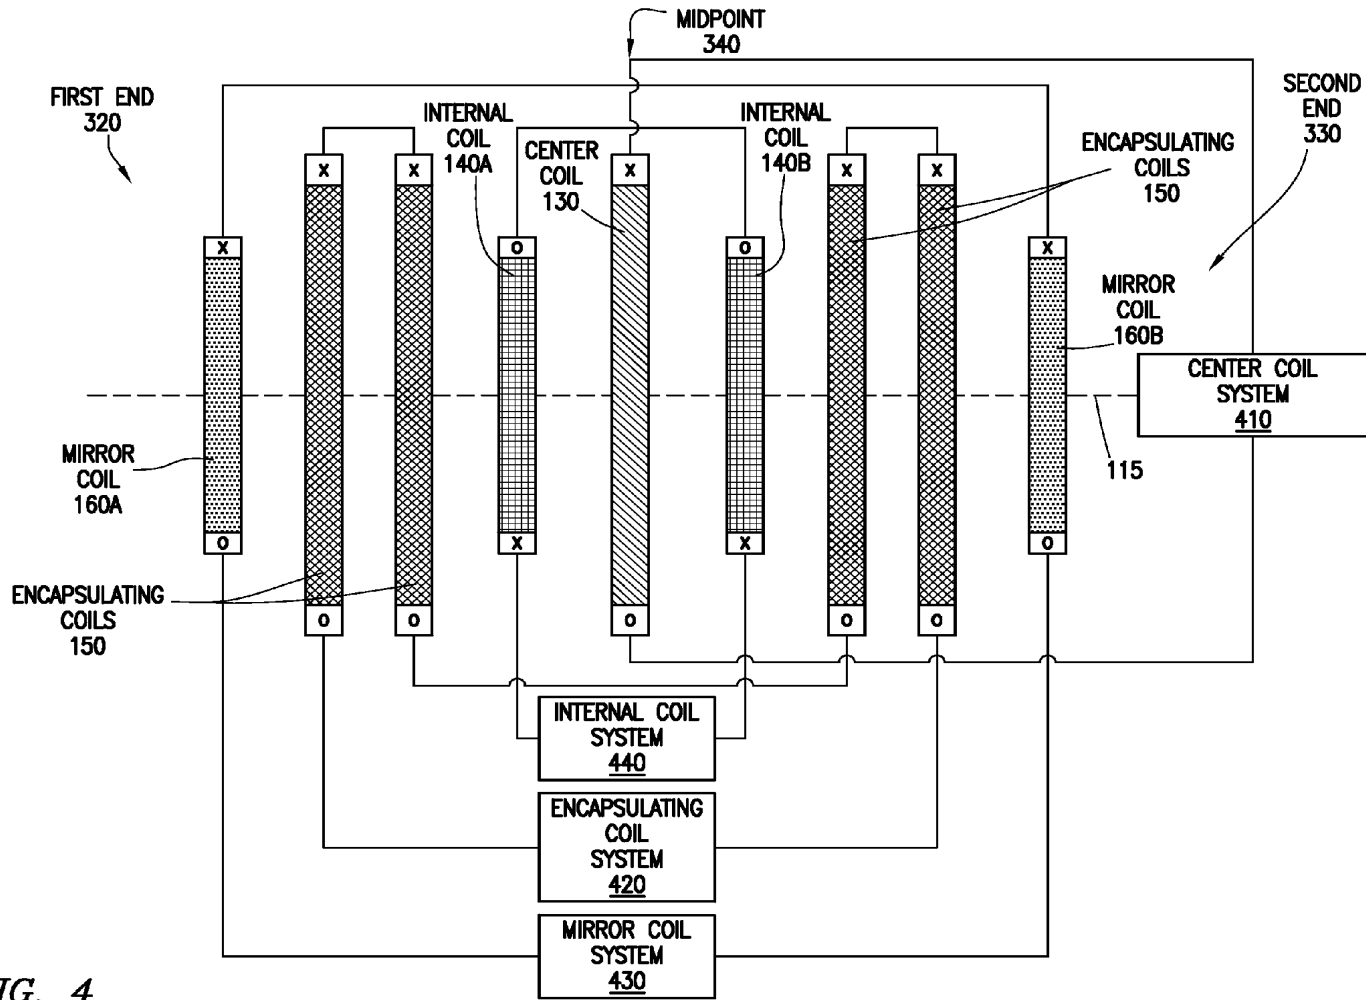


FIG. 4

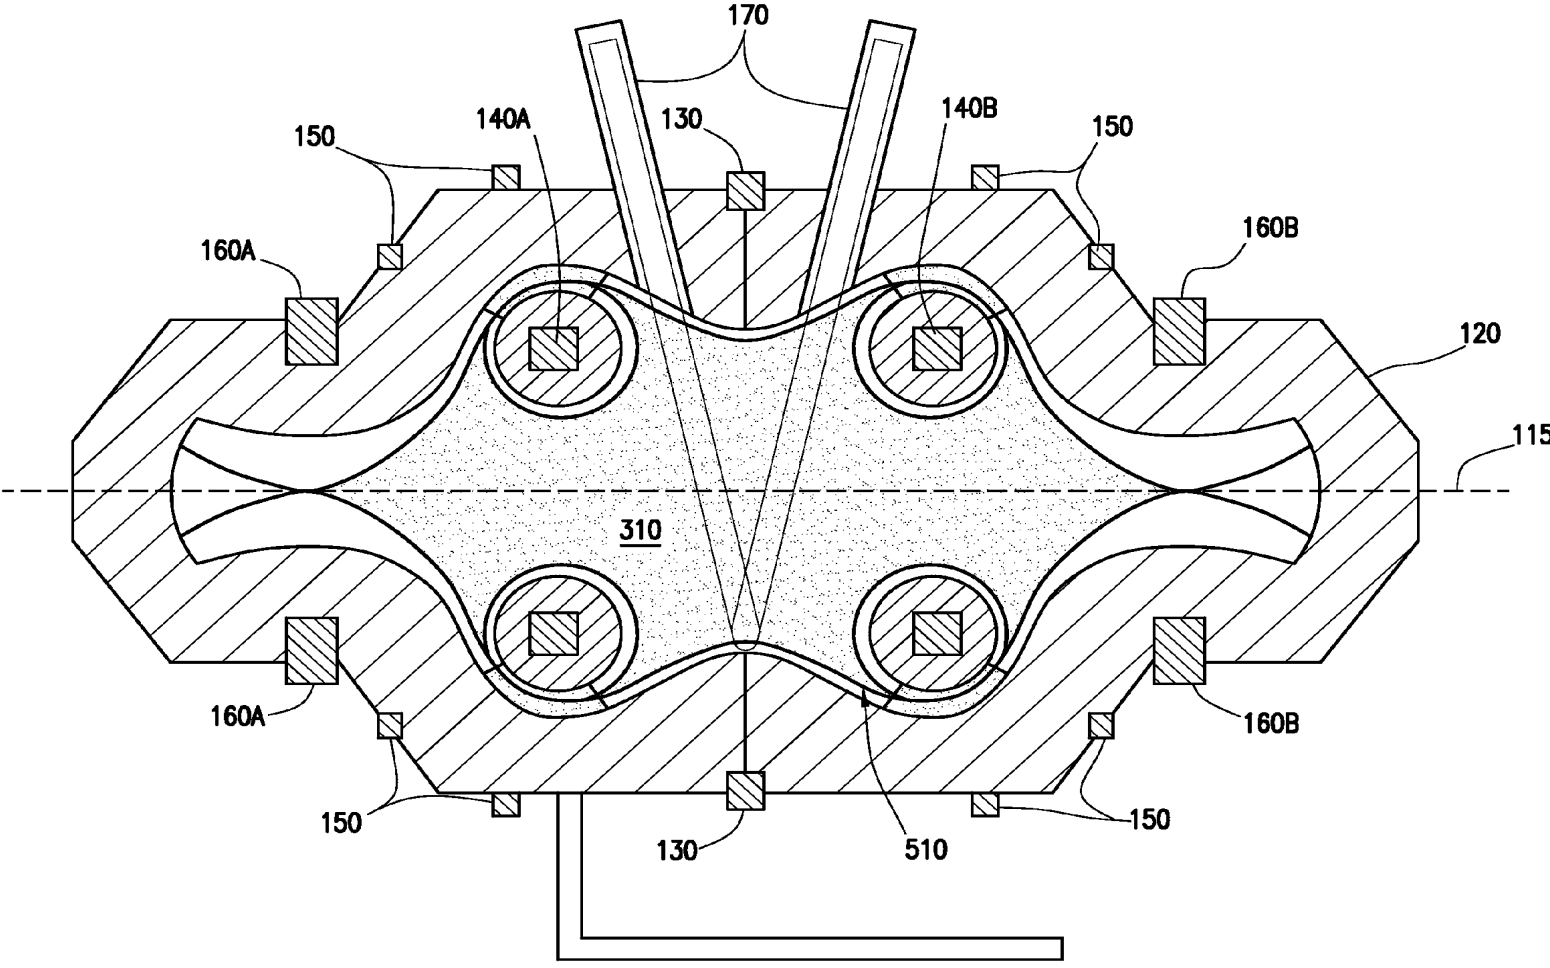


FIG. 5



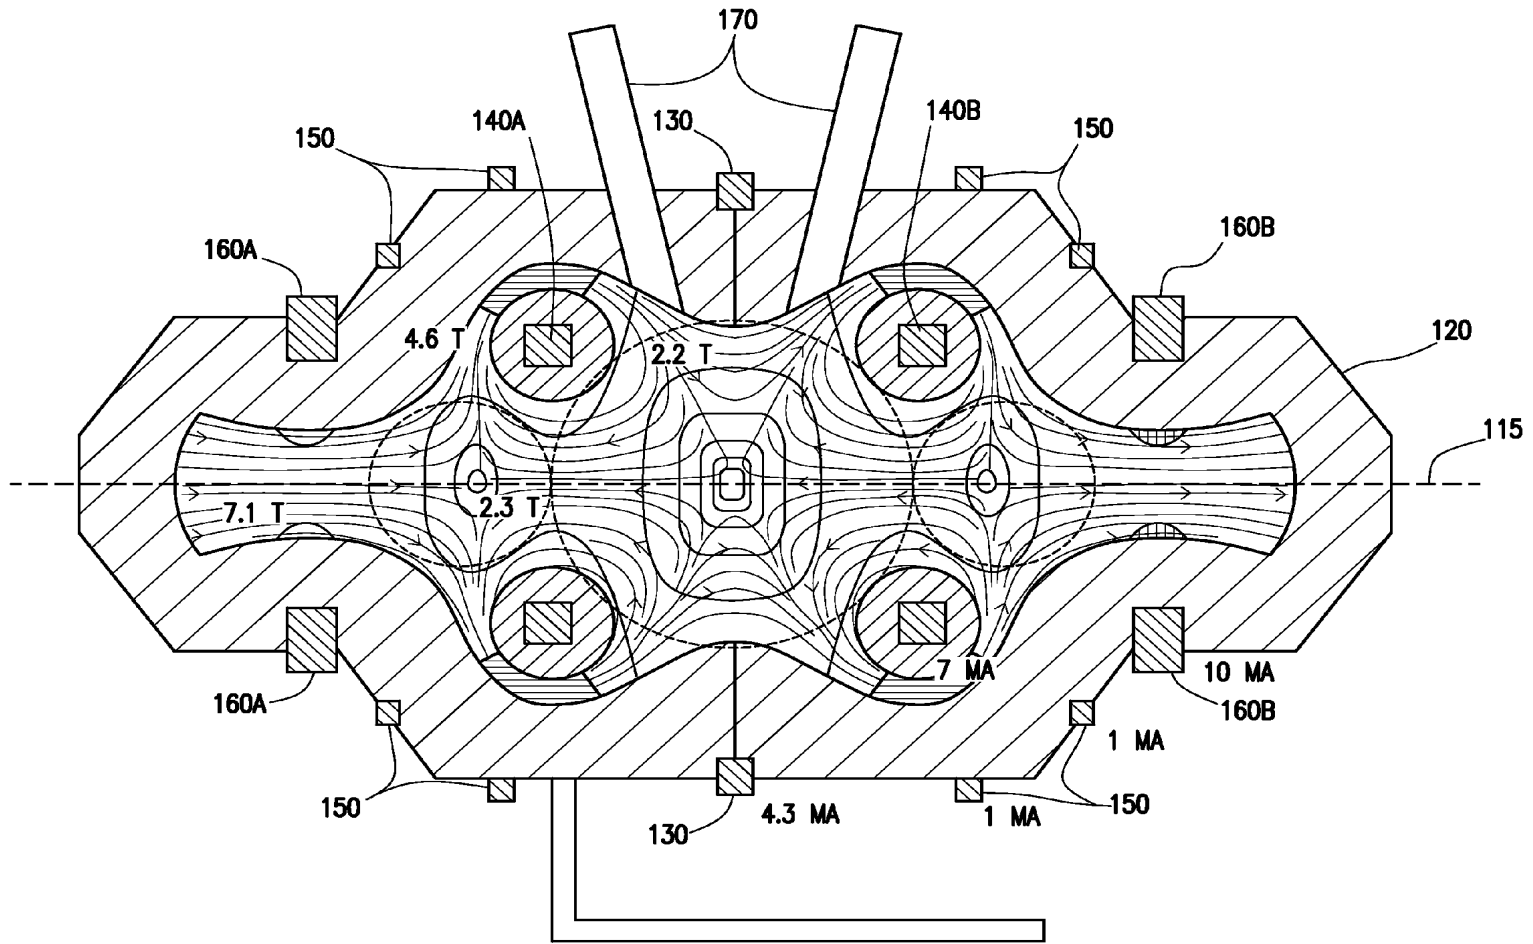


FIG. 6

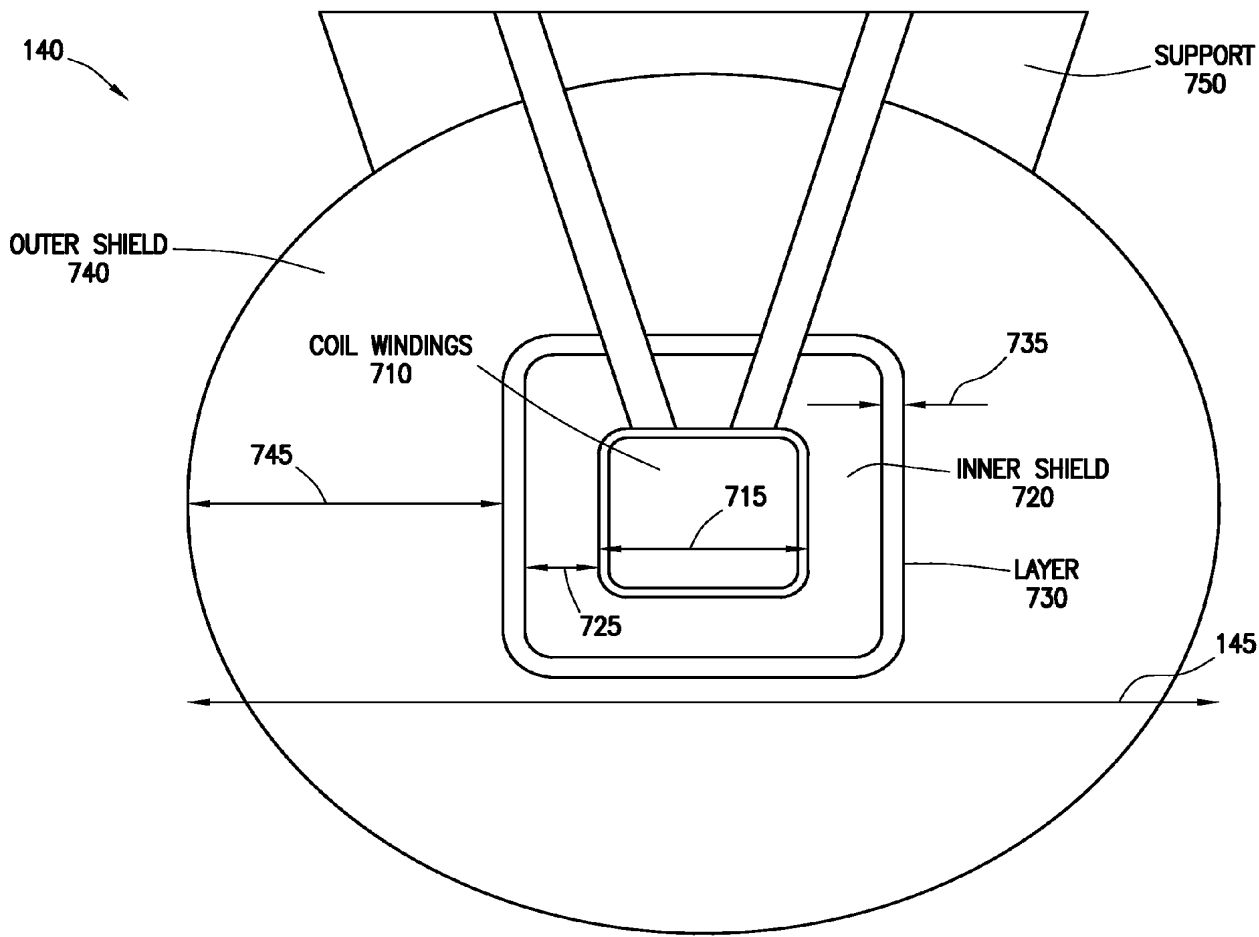


FIG. 7

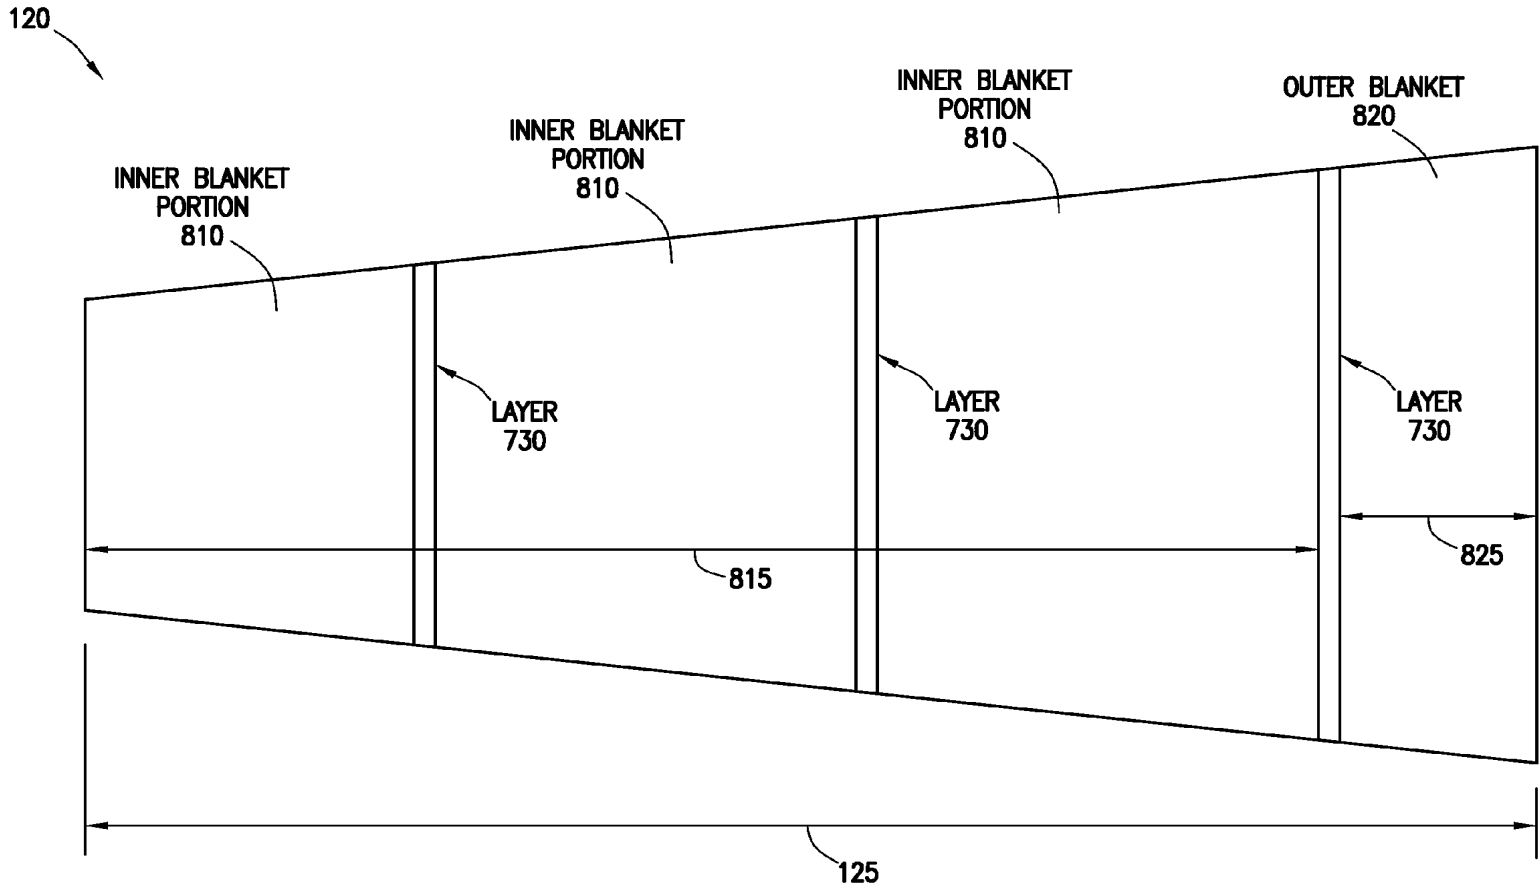


FIG. 8

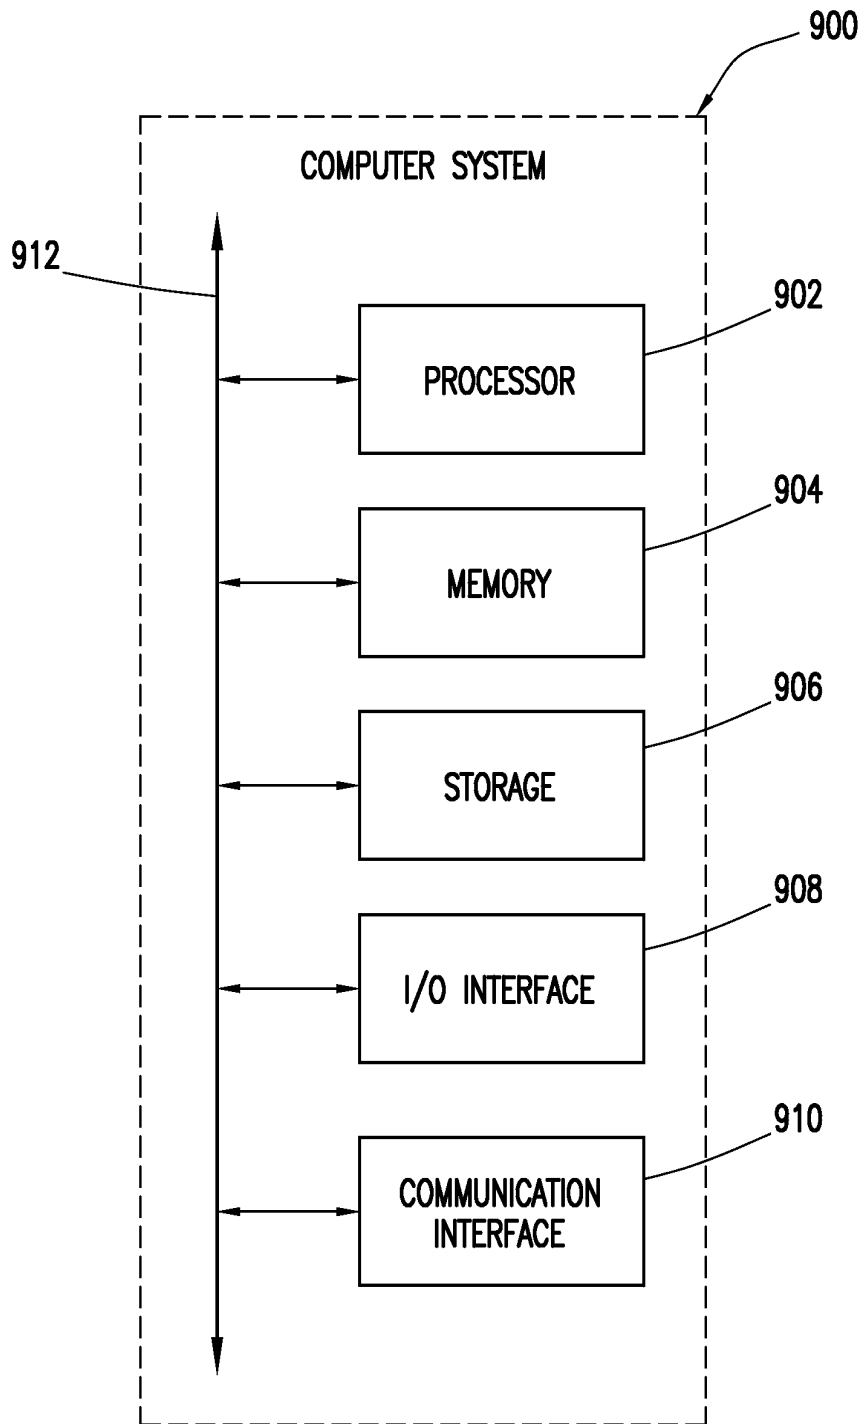


FIG. 9

## HEATING PLASMA FOR FUSION POWER USING MAGNETIC FIELD OSCILLATION

### RELATED APPLICATIONS

**[0001]** This application claims the benefit under 35 U.S.C. §119(e) of the priority of the following U.S. Provisional Applications filed on Apr. 3, 2013, the entire disclosures of which are hereby incorporated by reference: U.S. Provisional Application No. 61/808,136, entitled “MAGNETIC FIELD PLASMA CONFINEMENT FOR COMPACT FUSION POWER”; U.S. Provisional Application No. 61/808,122, entitled “MAGNETIC FIELD PLASMA CONFINEMENT FOR COMPACT FUSION POWER”; U.S. Provisional Application No. 61/808,131, entitled “ENCAPSULATION AS A METHOD TO ENHANCE MAGNETIC FIELD PLASMA CONFINEMENT”; U.S. Provisional Application No. 61/807,932, entitled “SUPPORTS FOR STRUCTURES IMMERSSED IN PLASMA”; U.S. Provisional Application No. 61/808,110, entitled “RESONANT HEATING OF PLASMA WITH HELICON ANTENNAS”; U.S. Provisional Application No. 61/808,066, entitled “PLASMA HEATING WITH RADIO FREQUENCY WAVES”; U.S. Provisional Application No. 61/808,093, entitled “PLASMA HEATING WITH NEUTRAL BEAMS”; U.S. Provisional Application No. 61/808,089, entitled “ACTIVE COOLING OF STRUCTURES IMMERSSED IN PLASMA”; U.S. Provisional Application No. 61/808,101, entitled “PLASMA HEATING VIA FIELD OSCILLATIONS”; and U.S. Provisional Application No. 61/808,154, entitled “DIRECT ENERGY CONVERSION OF FUSION PLASMA ENERGY VIA CYCLED ADIABATIC COMPRESSION AND EXPANSION”.

### TECHNICAL FIELD

**[0002]** This disclosure generally relates to fusion reactors and more specifically to heating plasma using magnetic field oscillations.

### BACKGROUND

**[0003]** Fusion power is power that is generated by a nuclear fusion process in which two or more atomic nuclei collide at very high speed and join to form a new type of atomic nucleus. A fusion reactor is a device that produces fusion power by confining and controlling plasma. Typical fusion reactors are large, complex, and cannot be mounted on a vehicle.

### SUMMARY OF PARTICULAR EMBODIMENTS

**[0004]** According to one embodiment, a fusion reactor includes two internal magnetic coils suspended within an enclosure, a center magnetic coil coaxial with the two internal magnetic coils and located proximate to a midpoint of the enclosure, a plurality of encapsulating magnetic coils coaxial with the internal magnetic coils, and two mirror magnetic coil coaxial with the internal magnetic coils. The fusion reactor is configured to vary electrical currents supplied to the magnetic coils to heat the plasma confined within the magnetic wall.

**[0005]** Technical advantages of certain embodiments may include providing a compact fusion reactor that is less complex and less expensive to build than typical fusion reactors. Some embodiments may provide a fusion reactor that is compact enough to be mounted on or in a vehicle such as a truck, aircraft, ship, train, spacecraft, or submarine. Some embodiments may provide a fusion reactor that may be utilized in

desalination plants or electrical power plants. Other technical advantages will be readily apparent to one skilled in the art from the following figures, descriptions, and claims. Moreover, while specific advantages have been enumerated above, various embodiments may include all, some, or none of the enumerated advantages.

### BRIEF DESCRIPTION OF THE DRAWINGS

**[0006]** FIG. 1 illustrates example applications for fusion reactors, according to certain embodiments.

**[0007]** FIG. 2 illustrates an example aircraft system utilizing fusion reactors, according to certain embodiments.

**[0008]** FIGS. 3A and 3B illustrate an example fusion reactor, according to certain embodiments.

**[0009]** FIG. 3C illustrates the effects on the magnetic wall due to magnetic field oscillations in the fusion reactor, according to certain embodiments.

**[0010]** FIG. 4 illustrates a simplified view of the coils and example systems for energizing the coils of the fusion reactor of FIGS. 3A and 3B, according to certain embodiments.

**[0011]** FIG. 5 illustrates plasma within the fusion reactor of FIGS. 3A and 3B, according to certain embodiments.

**[0012]** FIG. 6 illustrates magnetic fields of the fusion reactor of FIGS. 3A and 3B, according to certain embodiments.

**[0013]** FIG. 7 illustrates an internal coil of the fusion reactor of FIGS. 3A and 3B, according to certain embodiments.

**[0014]** FIG. 8 illustrates a cut-away view of the enclosure of the fusion reactor of FIGS. 3A and 3B, according to certain embodiments.

**[0015]** FIG. 9 illustrates an example computer system, according to certain embodiments.

### DESCRIPTION OF EXAMPLE EMBODIMENTS

**[0016]** Fusion reactors generate power by confining and controlling plasma that is used in a nuclear fusion process. Typically, fusion reactors are extremely large and complex devices. Because of their prohibitively large sizes, it is not feasible to mount typical fusion reactors on vehicles. As a result, the usefulness of typical fusion reactors is limited.

**[0017]** The teachings of the disclosure recognize that it is desirable to provide a compact fusion reactor that is small enough to mount on or in vehicles such as trucks, trains, aircraft, ships, submarines, spacecraft, and the like. For example, it may be desirable to provide truck-mounted compact fusion reactors that may provide a decentralized power system. As another example, it may be desirable to provide a compact fusion reactor for an aircraft that greatly expands the range and operating time of the aircraft. In addition, it may be desirable to provide a fusion reactor that may be utilized in power plants and desalination plants. The following describes an encapsulated linear ring cusp fusion reactor for providing these and other desired benefits associated with compact fusion reactors.

**[0018]** FIG. 1 illustrates applications of a fusion reactor 110, according to certain embodiments. As one example, one or more embodiments of fusion reactor 110 are utilized by aircraft 101 to supply heat to one or more engines (e.g., turbines) of aircraft 101. A specific example of utilizing one or more fusion reactors 110 in an aircraft is discussed in more detail below in reference to FIG. 2. In another example, one or more embodiments of fusion reactor 110 are utilized by ship 102 to supply electricity and propulsion power. While an aircraft carrier is illustrated for ship 102 in FIG. 1, any type of

ship (e.g., a cargo ship, a cruise ship, etc.) may utilize one or more embodiments of fusion reactor 110. As another example, one or more embodiments of fusion reactor 110 may be mounted to a flat-bed truck 103 in order to provide decentralized power or for supplying power to remote areas in need of electricity. As another example, one or more embodiments of fusion reactor 110 may be utilized by an electrical power plant 104 in order to provide electricity to a power grid. While specific applications for fusion reactor 110 are illustrated in FIG. 1, the disclosure is not limited to the illustrated applications. For example, fusion reactor 110 may be utilized in other applications such as trains, desalination plants, spacecraft, submarines, and the like.

[0019] In general, fusion reactor 110 is a device that generates power by confining and controlling plasma that is used in a nuclear fusion process. Fusion reactor 110 generates a large amount of heat from the nuclear fusion process that may be converted into various forms of power. For example, the heat generated by fusion reactor 110 may be utilized to produce steam for driving a turbine and an electrical generator, thereby producing electricity. As another example, as discussed further below in reference to FIG. 2, the heat generated by fusion reactor 110 may be utilized directly by a turbine of a turbofan or fanjet engine of an aircraft instead of a combustor.

[0020] Fusion reactor 110 may be scaled to have any desired output for any desired application. For example, one embodiment of fusion reactor 110 may be approximately 10 m×7 m and may have a gross heat output of approximately 100 MW. In other embodiments, fusion reactor 110 may be larger or smaller depending on the application and may have a greater or smaller heat output. For example, fusion reactor 110 may be scaled in size in order to have a gross heat output of over 200 MW.

[0021] FIG. 2 illustrates an example aircraft system 200 that utilizes one or more fusion reactors 110, according to certain embodiments. Aircraft system 200 includes one or more fusion reactors 110, a fuel processor 210, one or more auxiliary power units (APUs) 220, and one or more turbofans 230. Fusion reactors 110 supply hot coolant 240 to turbofans 230 (e.g., either directly or via fuel processor 210) using one or more heat transfer lines. In some embodiments, hot coolant 240 is FLiBe (i.e., a mixture of lithium fluoride (LiF) and beryllium fluoride (BeF<sub>2</sub>)) or LiPb. In some embodiments, hot coolant 240 is additionally supplied to APUs 220. Once used by turbofans 240, return coolant 250 is fed back to fusion reactors 110 to be heated and used again. In some embodiments, return coolant 250 is fed directly to fusion reactors 110. In some embodiments, return coolant 250 may additionally be supplied to fusion reactors 110 from APUs 220.

[0022] In general, aircraft system 200 utilizes one or more fusion reactors 110 in order to provide heat via hot coolant 240 to turbofans 230. Typically, a turbofan utilizes a combustor that burns jet fuel in order to heat intake air, thereby producing thrust. In aircraft system 200, however, the combustors of turbofans 230 have been replaced by heat exchangers that utilize hot coolant 240 provided by one or more fusion reactors 110 in order to heat the intake air. This may provide numerous advantages over typical turbofans. For example, by allowing turbofans 230 to operate without combustors that burn jet fuel, the range of aircraft 101 may be greatly extended. In addition, by greatly reducing or eliminating the need for jet fuel, the operating cost of aircraft 101 may be significantly reduced.

[0023] FIGS. 3A and 3B illustrate a fusion reactor 110 that may be utilized in the example applications of FIG. 1, according to certain embodiments. In general, fusion reactor 110 is an encapsulated linear ring cusp fusion reactor in which encapsulating magnetic coils 150 are used to prevent plasma that is generated using internal cusp magnetic coils from expanding. In some embodiments, fusion reactor 110 includes an enclosure 120 with a center line 115 running down the center of enclosure 120 as shown. In some embodiments, enclosure 120 includes a vacuum chamber and has a cross-section as discussed below in reference to FIG. 7. Fusion reactor 110 includes internal coils 140 (e.g., internal coils 140a and 140, also known as “cusp” coils), encapsulating coils 150, and mirror coils 160 (e.g., mirror coils 160a and 160b). Internal coils 140 are suspended within enclosure 120 by any appropriate means and are centered on center line 115. Encapsulating coils 150 are also centered on center line 115 and may be either internal or external to enclosure 120. For example, encapsulating coils 150 may be suspended within enclosure 120 in some embodiments. In other embodiments, encapsulating coils 150 may be external to enclosure 120 as illustrated in FIGS. 3A and 3B.

[0024] In general, fusion reactor 110 provides power by controlling and confining plasma 310 within enclosure 120 for a nuclear fusion process. Internal coils 140, encapsulating coils 150, and mirror coils 160 are energized to form magnetic fields which confine plasma 310 into a shape such as the shape shown in FIGS. 3B and 5. Certain gases, such as deuterium and tritium gases, may then be reacted to make energetic particles which heat plasma 310 and the walls of enclosure 120. The generated heat may then be used, for example, to power vehicles. For example, a liquid metal coolant such as FLiBe or LiPb may carry heat from the walls of fusion reactor 110 out to engines of an aircraft. In some embodiments, combustors in gas turbine engines may be replaced with heat exchangers that utilize the generated heat from fusion reactor 110. In some embodiments, electrical power may also be extracted from fusion reactor 110 via magnetohydrodynamic (MHD) processes.

[0025] Fusion reactor 110 is an encapsulated linear ring cusp fusion device. The main plasma confinement is accomplished in some embodiments by a central linear ring cusp (e.g., center coil 130) with two spindle cusps located axially on either side (e.g., internal coils 140). These confinement regions are then encapsulated (e.g., with encapsulating coils 150) within a coaxial mirror field provided by mirror coils 160.

[0026] The magnetic fields of fusion reactor 110 are provided by coaxially located magnetic field coils of varying sizes and currents. The ring cusp losses of the central region are mitigated by recirculation into the spindle cusps. This recirculating flow is made stable and compact by the encapsulating fields provided by encapsulating coils 150. The outward diffusion losses and axial losses from the main confinement zones are mitigated by the strong mirror fields of the encapsulating field provided by encapsulating coils 150. To function as a fusion energy producing device, heat is added to the confined plasma 310, causing it to undergo fusion reactions and produce heat. This heat can then be harvested to produce useful heat, work, and/or electrical power.

[0027] Fusion reactor 110 is an improvement over existing systems in part because global MHD stability can be preserved and the losses through successive confinement zones are more isolated due to the scattering of particles moving

along the null lines. This feature means that particles moving along the center line are not likely to pass immediately out of the system, but will take many scattering events to leave the system. This increases their lifetime in the device, increasing the ability of the reactor to produce useful fusion power.

[0028] Fusion reactor 110 has novel magnetic field configurations that exhibit global MHD stability, has a minimum of particle losses via open field lines, uses all of the available magnetic field energy, and has a greatly simplified engineering design. The efficient use of magnetic fields means the disclosed embodiments may be an order of magnitude smaller than typical systems, which greatly reduces capital costs for power plants. In addition, the reduced costs allow the concept to be developed faster as each design cycle may be completed much quicker than typical system. In general, the disclosed embodiments have a simpler, more stable design with far less physics risk than existing systems.

[0029] Enclosure 120 is any appropriate chamber or device for containing a fusion reaction. In some embodiments, enclosure 120 is a vacuum chamber that is generally cylindrical in shape. In other embodiments, enclosure 120 may be a shape other than cylindrical. In some embodiments, enclosure 120 has a centerline 115 running down a center axis of enclosure 120 as illustrated. In some embodiments, enclosure 120 has a first end 320 and a second end 330 that is opposite from first end 320. In some embodiments, enclosure 120 has a midpoint 340 that is substantially equidistant between first end 320 and second end 330. A cross-section of a particular embodiment of enclosure 120 is discussed below in reference to FIG. 8.

[0030] Some embodiments of fusion reactor 110 may include a center coil 130. Center coil 130 is generally located proximate to midpoint 340 of enclosure 120. In some embodiments, center coil 130 is centered on center line 115 and is coaxial with internal coils 140. Center coil 130 may be either internal or external to enclosure 120, may be located at any appropriate axial position with respect to midpoint 340, may have any appropriate radius, may carry any appropriate current, and may have any appropriate amperturns.

[0031] Internal coils 140 are any appropriate magnetic coils that are suspended or otherwise positioned within enclosure 120. In some embodiments, internal coils 140 are superconducting magnetic coils. In some embodiments, internal coils 140 are toroidal in shape as shown in FIG. 3B. In some embodiments, internal coils 140 are centered on centerline 115. In some embodiments, internal coils 140 include two coils: a first internal coil 140a that is located between midpoint 340 and first end 320 of enclosure 120, and a second internal coil 140b that is located between midpoint 340 and second end 330 of enclosure 120. Internal coils 140 may be located at any appropriate axial position with respect to midpoint 340, may have any appropriate radius, may carry any appropriate current, and may have any appropriate amperturns. A particular embodiment of an internal coil 140 is discussed in more detail below in reference to FIG. 7.

[0032] Encapsulating coils 150 are any appropriate magnetic coils and generally have larger diameters than internal coils 140. In some embodiments, encapsulating coils 150 are centered on centerline 115 and are coaxial with internal coils 140. In general, encapsulating coils 150 encapsulate internal coils 140 and operate to close the original magnetic lines of internal coils 140 inside a magnetosphere. Closing these lines may reduce the extent of open field lines and reduce losses via recirculation. Encapsulating coils 150 also preserve the MHD

stability of fusion reactor 110 by maintaining a magnetic wall that prevents plasma 310 from expanding. Encapsulating coils 150 have any appropriate cross-section, such as square or round. In some embodiments, encapsulating coils 150 are suspended within enclosure 120. In other embodiments, encapsulating coils 150 may be external to enclosure 120 as illustrated in FIGS. 3A and 3B. Encapsulating coils 150 may be located at any appropriate axial position with respect to midpoint 340, may have any appropriate radius, may carry any appropriate current, and may have any appropriate amperturns.

[0033] Fusion reactor 110 may include any number and arrangement of encapsulating coils 150. In some embodiments, encapsulating coils 150 include at least one encapsulating coil 150 positioned on each side of midpoint 340 of enclosure 120. For example, fusion reactor 110 may include two encapsulating coils 150: a first encapsulating coil 150 located between midpoint 340 and first end 320 of enclosure 120, and a second encapsulating coil 150 located between midpoint 340 and second end 330 of enclosure 120. In some embodiments, fusion reactor 110 includes a total of two, four, six, eight, or any other even number of encapsulating coils 150. In certain embodiments, fusion reactor 110 includes a first set of two encapsulating coils 150 located between internal coil 140a and first end 320 of enclosure 120, and a second set of two encapsulating coils 150 located between internal coil 140b and second end 330 of enclosure 120. While particular numbers and arrangements of encapsulating coils 150 have been disclosed, any appropriate number and arrangement of encapsulating coils 150 may be utilized by fusion reactor 110.

[0034] Mirror coils 160 are magnetic coils that are generally located close to the ends of enclosure 120 (i.e., first end 320 and second end 330). In some embodiments, mirror coils 160 are centered on center line 115 and are coaxial with internal coils 140. In general, mirror coils 160 serve to decrease the axial cusp losses and make all the recirculating field lines satisfy an average minimum-p, a condition that is not satisfied by other existing recirculating schemes. In some embodiments, mirror coils 160 include two mirror coils 160: a first mirror coil 160a located proximate to first end 320 of enclosure 120, and a second mirror coil 160b located proximate to second end 330 of enclosure 120. Mirror coils 160 may be either internal or external to enclosure 120, may be located at any appropriate axial position with respect to midpoint 340, may have any appropriate radius, may carry any appropriate current, and may have any appropriate amperturns.

[0035] In some embodiments, coils 130, 140, 150, and 160 are designed or chosen according to certain constraints. For example, coils 130, 140, 150, and 160 may be designed according to constraints including: high required currents (maximum in some embodiments of approx. 10 MegaAmp-turns); steady-state continuous operation; vacuum design (protected from plasma impingement), toroidal shape, limit outgassing; materials compatible with 150 C bakeout; thermal build-up; and cooling between shots.

[0036] Fusion reactor 110 may include one or more heat injectors 170. Heat injectors 170 are generally operable to allow any appropriate heat to be added to fusion reactor 110 in order to heat plasma 310. In some embodiments, for example, heat injectors 170 may be utilized to add neutral beams in order to heat plasma 310 within fusion reactor 110.

[0037] In operation, fusion reactor 110 generates fusion power by controlling the shape of plasma 310 for a nuclear

fusion process using at least internal coils **140**, encapsulating coils **150**, and mirror coils **160**. Internal coils **140** and encapsulating coils **150** are energized to form magnetic fields which confine plasma **310** into a shape such as the shape shown in FIGS. **3B** and **5**. Gases such as deuterium and tritium may then be reacted to make energetic particles which heat plasma **310** and the walls of enclosure **120**. The generated heat may then be used for power. For example, a liquid metal coolant may carry heat from the walls of the reactor out to engines of an aircraft. In some embodiments, electrical power may also be extracted from fusion reactor **110** via MHD.

**[0038]** In order to expand the volume of plasma **310** and create a more favorable minimum- $\beta$  geometry, the number of internal coils can be increased to make a cusp. In some embodiments of fusion reactor **110**, the sum of internal coils **140**, center coil **130**, and mirror coils **160** is an odd number in order to obtain the encapsulation by the outer 'solenoid' field (i.e., the magnetic field provided by encapsulating coils **150**). This avoids making a ring cusp field and therefore ruining the encapsulating separatrix. Two internal coils **140** and center coil **130** with alternating polarizations give a magnetic well with minimum- $\beta$  characteristics within the cusp and a quasi-spherical core plasma volume. The addition of two axial 'mirror' coils (i.e., mirror coils **160**) serves to decrease the axial cusp losses and more importantly makes the recirculating field lines satisfy average minimum- $\beta$ , a condition not satisfied by other existing recirculating schemes. In some embodiments, additional pairs of internal coils **140** could be added to create more plasma volume in the well. However, such additions may increase the cost and complexity of fusion reactor **110** and may require additional supports for coils internal to plasma **310**.

**[0039]** In the illustrated embodiments of fusion reactor **110**, only internal coils **140** are within plasma **310**. In some embodiments, internal coils **140** are suspending within enclosure **120** by one or more supports, such as support **750** illustrated in FIG. **7**. While the supports sit outside the central core plasma well, they may still experience high plasma fluxes. Alternatively, internal coils **140** of some embodiments may be amenable to levitation, which would remove the risk and complexity of having support structures within plasma **310**.

**[0040]** FIG. **3C** illustrates the effects on magnetic wall **390** due to magnetic field oscillations in fusion reactor **110**. As explained above, the magnetic field in fusion reactor **110** may be created by energizing coils such as central coil **130** and internal coils **140**. This magnetic field may cause the formation of a magnetic wall **390** as shown in FIG. **3C**, which may confine plasma **310** within fusion reactor **110**. By varying the amount of energy applied to the coils in fusion reactor **110**, the shape of the magnetic wall **390** may also be varied. For instance, as illustrated in FIG. **3C**, increasing the amount of current in the central coil may cause the magnetic wall to take the form of a dumbbell, while decreasing the amount of current in the central coil may cause the magnetic wall to take a toroidal form. Cycles of magnetic wall variation (such as between the bottom two states of FIG. **3C**) may cause heating of plasma **310** through adiabatic compression. By cycling the magnetic field and staggering such variation is multiple regions of fusion reactor **110**, adiabatic compression heating may be useful for steady-state operation of fusion reactions rather than just start-up phases. Heating using magnetic field oscillations may be used in addition to, or in lieu of, plasma heating using EM waves or neutral beam injection.

**[0041]** Adiabatic heating occurs in plasma as the magnetic flux through a gyro-orbiting particle is constant and the orbits are compressed at a rate faster than the dominant transport phenomena. This process directly increases the transverse energy of the particles, which in turn heats them. As plasma **310** is compressed by variations in the magnetic field, its temperature, density and confinement time all increase, resulting in increased fusion output and heating in the compressed state. If the field is then allowed to decrease, the plasma will expand and the process can be started anew. This process can be done continually in an AC fashion as described above or once at the start-up phase to initiate fusion conditions with minimal input power requirements. Heating of plasma **310** by magnetic field oscillations is particularly suited to configurations where surface magnetic fields contain a central plasma, such as in minimum- $\beta$  devices such as fusion reactor **110**.

**[0042]** As described above, central coil **130** can be controlled independently of internal coils **140** (or other coils of fusion reactor **110** such as encapsulating coils **150**) and be used to compress plasma **310** confined by magnetic wall **390**. In certain embodiments, plasma **310** may be mirror confined along the surface of magnetic wall **390** and may be adiabatically heated during compression. When compressed, the central field-free region may be reduced in volume. Thus, the density of plasma **310** may increase, boosting fusion reactions in fusion reactor **110**. Once compressed, the energy output of the fusion reactions in the plasma may cause an increase in the temperature of plasma **310**. As the magnetic fields are reduced in the cycling process described above, plasma **310** will cool down. However, the fusion output in the compressed state results in a net heating effect of plasma **310**.

**[0043]** In some embodiments, the variation in energy applied to other coils (such as internal coils **140** or encapsulating coils **150**) may also be used to further compress and decompress plasma **310**. Such variation may be uniform among the various magnetic coils. Uniform variation may refer to variation of the electrical currents supplied to the magnetic coils in order to cause a uniform heating of plasma **310** in fusion reactor **110**. Furthermore, in particular embodiments, variation of the electrical currents supplied to the magnetic coils may be non-uniform among the various magnetic coils in fusion reactor **110**. Non-uniform variation may refer to using magnetic field oscillations from the different magnetic coils of fusion reactor **110** at different times. Such non-uniform variation of the magnetic fields may cause different portions of plasma **310** in fusion reactor **110** to be compressed at different locations within fusion reactor **110**, may allow for plasma **310** to be evenly heated over time.

**[0044]** FIG. **4** illustrates a simplified view of the coils of fusion reactor **110** and example systems for energizing the coils. In this embodiment, the field geometry is sized to be the minimum size necessary to achieve adequate ion magnetization with fields that can be produced by simple magnet technology. Adequate ion magnetization was considered to be  $\sim 5$  ion gyro radii at design average ion energy with respect to the width of the recirculation zone. At the design energy of 100 eV plasma temperature there are 13 ion diffusion jumps and at full 20 KeV plasma energy there are 6.5 ion jumps. This is the lowest to maintain a reasonable magnetic field of 2.2 T in the cusps and keep a modest device size.

**[0045]** As illustrated in FIG. **4**, certain embodiments of fusion reactor **110** include two mirror coils **160**: a first mirror coil **160a** located proximate to first end **320** of the enclosure



and a second magnetic coil **160b** located proximate to second end **330** of enclosure **120**. Certain embodiments of fusion reactor **110** also include a center coil **130** that is located proximate to midpoint **340** of enclosure **120**. Certain embodiments of fusion reactor **110** also include two internal coils **140**: a first internal coil **140a** located between center coil **130** and first end **320** of enclosure **120**, and a second internal coil **140b** located between center coil **130** and second end **330** of enclosure **120**. In addition, certain embodiments of fusion reactor **110** may include two or more encapsulating coils **150**. For example, fusion reactor **110** may include a first set of two encapsulating coils **150** located between first internal coil **140a** and first end **320** of enclosure **120**, and a second set of two encapsulating coils **150** located between second internal coil **140b** and second end **330** of enclosure **120**. In some embodiments, fusion reactor **110** may include any even number of encapsulating coils **150**. In some embodiments, encapsulating coils **150** may be located at any appropriate position along center line **115** other than what is illustrated in FIG. 4. In general, encapsulating coils **150**, as well as internal coils **140** and mirror coils **160**, may be located at any appropriate position along center line **115** in order to maintain magnetic fields in the correct shape to achieve the desired shape of plasma **310**.

[0046] In some embodiments, electrical currents are supplied to coils **130**, **140**, **150**, and **160** as illustrated in FIG. 4. In this figure, each coil has been split along center line **115** and is represented by a rectangle with either an "X" or an "O" at each end. An "X" represents electrical current that is flowing into the plane of the paper, and an "O" represents electrical current that is flowing out the plane of the paper. Using this nomenclature, FIG. 4 illustrates how in this embodiment of fusion reactor **110**, electrical currents flow in the same direction through encapsulating coils **150**, center coil **130**, and mirror coils **160** (i.e., into the plane of the paper at the top of the coils), but flow in the opposite direction through internal coils **140** (i.e., into the plane of the paper at the bottom of the coils).

[0047] In some embodiments, the field geometry of fusion reactor **110** may be sensitive to the relative currents in the coils, but the problem can be adequately decoupled to allow for control. First, the currents to opposing pairs of coils can be driven in series to guarantee that no asymmetries exist in the axial direction. The field in some embodiments is most sensitive to the center three coils (e.g., internal coils **140** and center coil **130**). With the currents of internal coil **140** fixed, the current in center coil **130** can be adjusted to tweak the shape of the central magnetic well. This region can be altered into an axial-oriented 'bar-bell' shape by increasing the current on center coil **130** as the increase in flux 'squeezes' the sphere into the axial shape. Alternatively, the current on center coil **130** can be reduced, resulting in a ring-shaped magnetic well at midpoint **340**. The radius of center coil **130** also sets how close the ring cusp null-line comes to internal coils **140** and may be chosen in order to have this null line close to the middle of the gap between center coil **130** and internal coils **140** to improve confinement.

[0048] The radius of internal coils **140** serves to set the balance of the relative field strength between the point cusps and the ring cusps for the central well. The baseline sizes may be chosen such that these field values are roughly equal. While it would be favorable to reduce the ring cusp losses by increasing the relative flux in this area, a balanced approach may be more desirable.

[0049] In some embodiments, the magnetic field is not as sensitive to mirror coils **160** and encapsulating coils **150**, but their dimensions should be chosen to achieve the desired shape of plasma **310**. In some embodiments, mirror coils **160** may be chosen to be as strong as possible without requiring more complex magnets, and the radius of mirror coils **160** may be chosen to maintain good diagnostic access to the device center. Some embodiments may benefit from shrinking mirror coils **160**, thereby achieving higher mirror ratios for less current but at the price of reduced axial diagnostic access.

[0050] In general, encapsulating coils **150** have weaker magnetic fields than the other coils within fusion reactor **110**. Thus, the positioning of encapsulating coils **150** is less critical than the other coils. In some embodiments, the positions of encapsulating coils **150** are defined such that un-interrupted access to the device core is maintained for diagnostics. In some embodiments, an even number of encapsulating coils **150** may be chosen to accommodate supports for internal coils **140**. The diameters of encapsulating coils **150** are generally greater than those of internal coils **140**, and may be all equal for ease of manufacture and common mounting on or in a cylindrical enclosure **120**. In some embodiments, encapsulating coils **150** may be moved inward to the plasma boundary, but this may impact manufacturability and heat transfer characteristics of fusion reactor **110**.

[0051] In some embodiments, fusion reactor **110** includes various systems for energizing center coil **130**, internal coils **140**, encapsulating coils **150**, and mirror coils **160**. For example, a center coil system **410**, an encapsulating coil system **420**, a mirror coil system **430**, and an internal coil system **440** may be utilized in some embodiments. Coil systems **410-440** and coils **130-160** may be coupled as illustrated in FIG. 4. Coil systems **410-440** may be any appropriate systems for driving any appropriate amount of electrical currents through coils **130-160**. Center coil system **410** may be utilized to drive center coil **130**, encapsulating coil system **420** may be utilized to drive encapsulating coils **150**, mirror coil system **430** may be utilized to drive mirror coils **160**, and internal coil system **440** may be utilized to drive internal coils **140**. In other embodiments, more or fewer coil systems may be utilized than those illustrated in FIG. 4. In general, coil systems **410-440** may include any appropriate power sources such as battery banks.

[0052] FIG. 5 illustrates plasma **310** within enclosure **120** that is shaped and confined by center coil **130**, internal coils **140**, encapsulating coils **150**, and mirror coils **160**. As illustrated, an external mirror field is provided by mirror coils **160**. The ring cusp flow is contained inside the mirror. A trapped magnetized sheath **510** that is provided by encapsulating coils **150** prevents detachment of plasma **310**. Trapped magnetized sheath **510** is a magnetic wall that causes plasma **310** to recirculate and prevents plasma **310** from expanding outward. The recirculating flow is thus forced to stay in a stronger magnetic field. This provides complete stability in a compact and efficient cylindrical geometry. Furthermore, the only losses from plasma exiting fusion reactor **110** are at two small point cusps at the ends of fusion reactor **110** along center line **115**. This is an improvement over typical designs in which plasma detaches and exits at other locations.

[0053] The losses of certain embodiments of fusion reactor **110** are also illustrated in FIG. 5. As mentioned above, the only losses from plasma exiting fusion reactor **110** are at two small point cusps at the ends of fusion reactor **110** along

center line **115**. Other losses may include diffusion losses due to internal coils **140** and axial cusp losses. In addition, in embodiments in which internal coils **140** are suspended within enclosure **120** with one or more supports (e.g., “stalks”), fusion reactor **110** may include ring cusp losses due to the supports.

[0054] In some embodiments, internal coils **140** may be designed in such a way as to reduce diffusion losses. For example, certain embodiments of fusion reactor **110** may include internal coils **140** that are configured to conform to the shape of the magnetic field. This may allow plasma **310**, which follows the magnetic field lines, to avoid touching internal coils **140**, thereby reducing or eliminating losses. An example embodiment of internal coils **140** illustrating a conformal shape is discussed below in reference to FIG. 7.

[0055] FIG. 6 illustrates a magnetic field of certain embodiments of fusion reactor **110**. In general, fusion reactor **110** is designed to have a central magnetic well that is desired for high beta operation and to achieve higher plasma densities. As illustrated in FIG. 6, the magnetic field may include three magnetic wells. The central magnetic well can expand with high Beta, and fusion occurs in all three magnetic wells. Another desired feature is the suppression of ring cusp losses. As illustrated in FIG. 6, the ring cusps connect to each other and recirculate. In addition, good MHD stability is desired in all regions. As illustrated in FIG. 6, only two field penetrations are needed and MHD interchange is satisfied everywhere.

[0056] In some embodiments, the magnetic fields can be altered without any relocation of the coils by reducing the currents, creating for example weaker cusps and changing the balance between the ring and point cusps. The polarity of the currents could also be reversed to make a mirror-type field and even an encapsulated mirror. In addition, the physical locations of the coils could be altered.

[0057] FIG. 7 illustrates an example embodiment of an internal coil **140** of fusion reactor **110**. In this embodiment, internal coil **140** includes coil windings **710**, inner shield **720**, layer **730**, and outer shield **740**. In some embodiments, internal coil **140** may be suspended within enclosure **120** with one or more supports **750**. Coil windings **710** may have a width **715** and may be covered in whole or in part by inner shield **720**. Inner shield **720** may have a thickness **725** and may be covered in whole or in part by layer **730**. Layer **730** may have a thickness **735** and may be covered in whole or in part by outer shield **740**. Outer shield may have a thickness **745** and may have a shape that is conformal to the magnetic field within enclosure **120**. In some embodiments, internal coil **140** may have an overall diameter of approximately 1.04 m.

[0058] Coil windings **710** form a superconducting coil and carry an electric current that is typically in an opposite direction from encapsulating coils **150**, center coil **130**, and mirror coils **160**. In some embodiments, width **715** of coils winding is approximately 20 cm. Coil windings **710** may be surrounded by inner shield **720**. Inner shield **720** provides structural support, reduces residual neutron flux, and shields against gamma rays due to impurities. Inner shield **720** may be made of Tungsten or any other material that is capable of stopping neutrons and gamma rays. In some embodiments, thickness **725** of inner shield **720** is approximately 11.5 cm.

[0059] In some embodiments, inner shield **720** is surrounded by layer **730**. Layer **730** may be made of lithium (e.g., lithium-6) and may have thickness **735** of approximately 5 mm. Layer **730** may be surrounded by outer shield

**740**. Outer shield **740** may be made of FLiBe and may have thickness **745** of approximately 30 cm. In some embodiments, outer shield may be conformal to magnetic fields within enclosure **120** in order to reduce losses. For example, outer shield **740** may form a toroid.

[0060] FIG. 8 illustrates a cut-away view of enclosure **120** of certain embodiments of fusion reactor **110**. In some embodiments, enclosure **120** includes one or more inner blanket portions **810**, an outer blanket **820**, and one or more layers **730** described above. In the illustrated embodiment, enclosure **120** includes three inner blanket portions **810** that are separated by three layers **730**. Other embodiments may have any number or configuration of inner blanket portions **810**, layers **730**, and outer blanket **820**. In some embodiments, enclosure **120** may have a total thickness **125** of approximately 80 cm in many locations. In other embodiments, enclosure **120** may have a total thickness **125** of approximately 1.50 m in many locations. However, thickness **125** may vary over the length of enclosure **120** depending on the shape of the magnetic field within enclosure **120** (i.e., the internal shape of enclosure **120** may conform to the magnetic field as illustrated in FIG. 3b and thus may not be a uniform thickness **125**).

[0061] In some embodiments, inner blanket portions **810** have a combined thickness **815** of approximately 70 cm. In other embodiments, inner blanket portions **810** have a combined thickness **815** of approximately 126 cm. In some embodiments, inner blanket portions are made of materials such as Be, FLiBe, and the like.

[0062] Outer blanket **820** is any low activation material that does not tend to become radioactive under irradiation. For example, outer blanket **820** may be iron or steel. In some embodiments, outer blanket **820** may have a thickness **825** of approximately 10 cm.

[0063] FIG. 9 illustrates an example computer system **900**. In particular embodiments, one or more computer systems **900** are utilized by fusion reactor **110** for any aspects requiring computerized control. Particular embodiments include one or more portions of one or more computer systems **900**. Herein, reference to a computer system may encompass a computing device, and vice versa, where appropriate. Moreover, reference to a computer system may encompass one or more computer systems, where appropriate.

[0064] This disclosure contemplates any suitable number of computer systems **900**. This disclosure contemplates computer system **900** taking any suitable physical form. As example and not by way of limitation, computer system **900** may be an embedded computer system, a system-on-chip (SOC), a single-board computer system (SBC) (such as, for example, a computer-on-module (COM) or system-on-module (SOM)), a desktop computer system, a laptop or notebook computer system, an interactive kiosk, a mainframe, a mesh of computer systems, a mobile telephone, a personal digital assistant (PDA), a server, a tablet computer system, or a combination of two or more of these. Where appropriate, computer system **900** may include one or more computer systems **900**; be unitary or distributed; span multiple locations; span multiple machines; span multiple data centers; or reside in a cloud, which may include one or more cloud components in one or more networks. Where appropriate, one or more computer systems **900** may perform without substantial spatial or temporal limitation one or more steps of one or more methods described or illustrated herein. As an example and not by way of limitation, one or more computer systems

**900** may perform in real time or in batch mode one or more steps of one or more methods described or illustrated herein. One or more computer systems **900** may perform at different times or at different locations one or more steps of one or more methods described or illustrated herein, where appropriate.

[0065] In particular embodiments, computer system **900** includes a processor **902**, memory **904**, storage **906**, an input/output (I/O) interface **908**, a communication interface **910**, and a bus **912**. Although this disclosure describes and illustrates a particular computer system having a particular number of particular components in a particular arrangement, this disclosure contemplates any suitable computer system having any suitable number of any suitable components in any suitable arrangement.

[0066] In particular embodiments, processor **902** includes hardware for executing instructions, such as those making up a computer program. As an example and not by way of limitation, to execute instructions, processor **902** may retrieve (or fetch) the instructions from an internal register, an internal cache, memory **904**, or storage **906**; decode and execute them; and then write one or more results to an internal register, an internal cache, memory **904**, or storage **906**. In particular embodiments, processor **902** may include one or more internal caches for data, instructions, or addresses. This disclosure contemplates processor **902** including any suitable number of any suitable internal caches, where appropriate. As an example and not by way of limitation, processor **902** may include one or more instruction caches, one or more data caches, and one or more translation lookaside buffers (TLBs). Instructions in the instruction caches may be copies of instructions in memory **904** or storage **906**, and the instruction caches may speed up retrieval of those instructions by processor **902**. Data in the data caches may be copies of data in memory **904** or storage **906** for instructions executing at processor **902** to operate on; the results of previous instructions executed at processor **902** for access by subsequent instructions executing at processor **902** or for writing to memory **904** or storage **906**; or other suitable data. The data caches may speed up read or write operations by processor **902**. The TLBs may speed up virtual-address translation for processor **902**. In particular embodiments, processor **902** may include one or more internal registers for data, instructions, or addresses. This disclosure contemplates processor **902** including any suitable number of any suitable internal registers, where appropriate. Where appropriate, processor **902** may include one or more arithmetic logic units (ALUs); be a multi-core processor; or include one or more processors **902**. Although this disclosure describes and illustrates a particular processor, this disclosure contemplates any suitable processor.

[0067] In particular embodiments, memory **904** includes main memory for storing instructions for processor **902** to execute or data for processor **902** to operate on. As an example and not by way of limitation, computer system **900** may load instructions from storage **906** or another source (such as, for example, another computer system **900**) to memory **904**. Processor **902** may then load the instructions from memory **904** to an internal register or internal cache. To execute the instructions, processor **902** may retrieve the instructions from the internal register or internal cache and decode them. During or after execution of the instructions, processor **902** may write one or more results (which may be intermediate or final results) to the internal register or internal

cache. Processor **902** may then write one or more of those results to memory **904**. In particular embodiments, processor **902** executes only instructions in one or more internal registers or internal caches or in memory **904** (as opposed to storage **906** or elsewhere) and operates only on data in one or more internal registers or internal caches or in memory **904** (as opposed to storage **906** or elsewhere). One or more memory buses (which may each include an address bus and a data bus) may couple processor **902** to memory **904**. Bus **912** may include one or more memory buses, as described below. In particular embodiments, one or more memory management units (MMUs) reside between processor **902** and memory **904** and facilitate accesses to memory **904** requested by processor **902**. In particular embodiments, memory **904** includes random access memory (RAM). This RAM may be volatile memory, where appropriate. Where appropriate, this RAM may be dynamic RAM (DRAM) or static RAM (SRAM). Moreover, where appropriate, this RAM may be single-ported or multi-ported RAM. This disclosure contemplates any suitable RAM. Memory **904** may include one or more memories **904**, where appropriate. Although this disclosure describes and illustrates particular memory, this disclosure contemplates any suitable memory.

[0068] In particular embodiments, storage **906** includes mass storage for data or instructions. As an example and not by way of limitation, storage **906** may include a hard disk drive (HDD), a floppy disk drive, flash memory, an optical disc, a magneto-optical disc, magnetic tape, or a Universal Serial Bus (USB) drive or a combination of two or more of these. Storage **906** may include removable or non-removable (or fixed) media, where appropriate. Storage **906** may be internal or external to computer system **900**, where appropriate. In particular embodiments, storage **906** is non-volatile, solid-state memory. In particular embodiments, storage **906** includes read-only memory (ROM). Where appropriate, this ROM may be mask-programmed ROM, programmable ROM (PROM), erasable PROM (EPROM), electrically erasable PROM (EEPROM), electrically alterable ROM (EAROM), or flash memory or a combination of two or more of these. This disclosure contemplates mass storage **906** taking any suitable physical form. Storage **906** may include one or more storage control units facilitating communication between processor **902** and storage **906**, where appropriate. Where appropriate, storage **906** may include one or more storages **906**. Although this disclosure describes and illustrates particular storage, this disclosure contemplates any suitable storage.

[0069] In particular embodiments, I/O interface **908** includes hardware, software, or both, providing one or more interfaces for communication between computer system **900** and one or more I/O devices. Computer system **900** may include one or more of these I/O devices, where appropriate. One or more of these I/O devices may enable communication between a person and computer system **900**. As an example and not by way of limitation, an I/O device may include a keyboard, keypad, microphone, monitor, mouse, printer, scanner, speaker, still camera, stylus, tablet, touch screen, trackball, video camera, another suitable I/O device or a combination of two or more of these. An I/O device may include one or more sensors. This disclosure contemplates any suitable I/O devices and any suitable I/O interfaces **908** for them. Where appropriate, I/O interface **908** may include one or more device or software drivers enabling processor **902** to drive one or more of these I/O devices. I/O interface

**908** may include one or more I/O interfaces **908**, where appropriate. Although this disclosure describes and illustrates a particular I/O interface, this disclosure contemplates any suitable I/O interface.

**[0070]** In particular embodiments, communication interface **910** includes hardware, software, or both providing one or more interfaces for communication (such as, for example, packet-based communication) between computer system **900** and one or more other computer systems **900** or one or more networks. As an example and not by way of limitation, communication interface **910** may include a network interface controller (NIC) or network adapter for communicating with an Ethernet or other wire-based network or a wireless NIC (WNIC) or wireless adapter for communicating with a wireless network, such as a WI-FI network. This disclosure contemplates any suitable network and any suitable communication interface **910** for it. As an example and not by way of limitation, computer system **900** may communicate with an ad hoc network, a personal area network (PAN), a local area network (LAN), a wide area network (WAN), a metropolitan area network (MAN), or one or more portions of the Internet or a combination of two or more of these. One or more portions of one or more of these networks may be wired or wireless. As an example, computer system **900** may communicate with a wireless PAN (WPAN) (such as, for example, a BLUETOOTH WPAN), a WI-FI network, a WI-MAX network, a cellular telephone network (such as, for example, a Global System for Mobile Communications (GSM) network), or other suitable wireless network or a combination of two or more of these. Computer system **900** may include any suitable communication interface **910** for any of these networks, where appropriate. Communication interface **910** may include one or more communication interfaces **910**, where appropriate. Although this disclosure describes and illustrates a particular communication interface, this disclosure contemplates any suitable communication interface.

**[0071]** In particular embodiments, bus **912** includes hardware, software, or both coupling components of computer system **900** to each other. As an example and not by way of limitation, bus **912** may include an Accelerated Graphics Port (AGP) or other graphics bus, an Enhanced Industry Standard Architecture (EISA) bus, a front-side bus (FSB), a HYPERTRANSPORT (HT) interconnect, an Industry Standard Architecture (ISA) bus, an INFINIBAND interconnect, a low-pin-count (LPC) bus, a memory bus, a Micro Channel Architecture (MCA) bus, a Peripheral Component Interconnect (PCI) bus, a PCI-Express (PCIe) bus, a serial advanced technology attachment (SATA) bus, a Video Electronics Standards Association local (VLB) bus, or another suitable bus or a combination of two or more of these. Bus **912** may include one or more buses **912**, where appropriate. Although this disclosure describes and illustrates a particular bus, this disclosure contemplates any suitable bus or interconnect.

**[0072]** Herein, a computer-readable non-transitory storage medium or media may include one or more semiconductor-based or other integrated circuits (ICs) (such as, for example, field-programmable gate arrays (FPGAs) or application-specific ICs (ASICs)), hard disk drives (HDDs), hybrid hard drives (HHDs), optical discs, optical disc drives (ODDs), magneto-optical discs, magneto-optical drives, floppy diskettes, floppy disk drives (FDDs), magnetic tapes, solid-state drives (SSDs), RAM-drives, SECURE DIGITAL cards or drives, any other suitable computer-readable non-transitory storage media, or any suitable combination of two or more of

these, where appropriate. A computer-readable non-transitory storage medium may be volatile, non-volatile, or a combination of volatile and non-volatile, where appropriate.

**[0073]** Herein, “or” is inclusive and not exclusive, unless expressly indicated otherwise or indicated otherwise by context. Therefore, herein, “A or B” means “A, B, or both,” unless expressly indicated otherwise or indicated otherwise by context. Moreover, “and” is both joint and several, unless expressly indicated otherwise or indicated otherwise by context. Therefore, herein, “A and B” means “A and B, jointly or severally,” unless expressly indicated otherwise or indicated otherwise by context.

**[0074]** The scope of this disclosure encompasses all changes, substitutions, variations, alterations, and modifications to the example embodiments described or illustrated herein that a person having ordinary skill in the art would comprehend. The scope of this disclosure is not limited to the example embodiments described or illustrated herein. Moreover, although this disclosure describes and illustrates respective embodiments herein as including particular components, elements, functions, operations, or steps, any of these embodiments may include any combination or permutation of any of the components, elements, functions, operations, or steps described or illustrated anywhere herein that a person having ordinary skill in the art would comprehend. Furthermore, reference in the appended claims to an apparatus or system or a component of an apparatus or system being adapted to, arranged to, capable of, configured to, enabled to, operable to, or operative to perform a particular function encompasses that apparatus, system, component, whether or not it or that particular function is activated, turned on, or unlocked, as long as that apparatus, system, or component is so adapted, arranged, capable, configured, enabled, operable, or operative.

What is claimed is:

1. A fusion reactor comprising:

an enclosure comprising a centerline running down a center axis of the enclosure;

two internal magnetic coils suspended within the enclosure and centered on the centerline, the two internal magnetic coils each having a toroidal shape;

a plurality of encapsulating magnetic coils centered on the centerline, the encapsulating magnetic coils having a larger diameter than the internal magnetic coils;

a center magnetic coil centered on the centerline and located proximate to the midpoint of the enclosure; and wherein the magnetic coils are operable, when supplied with electrical currents, to form magnetic fields for confining plasma within the enclosure; and

wherein the fusion reactor is configured to vary the electrical currents supplied to the magnetic coils, to heat the plasma confined within the enclosure.

2. The fusion reactor of claim 1, wherein the fusion reactor is configured to supply electrical currents that cause the magnetic coils to form a magnetic wall that prevents plasma within the enclosure from expanding.

3. The fusion reactor of claim 1, wherein the fusion reactor is configured to supply electrical currents that cause the magnetic coils to form magnetic fields that confine the plasma along the surface of a magnetic wall.

4. The fusion reactor of claim 1, wherein the fusion reactor is configured to vary the electrical currents supplied to the center magnetic coil.

5. The fusion reactor of claim 4, wherein the fusion reactor is configured to vary the electrical currents supplied to the internal magnetic coils.

6. The fusion reactor of claim 5, wherein the fusion reactor is configured to vary the electrical currents supplied to the encapsulating magnetic coils.

7. The fusion reactor of claim 1, wherein the fusion reactor is configured to uniformly vary the electrical currents supplied to the magnetic coils.

8. The fusion reactor of claim 1, wherein the fusion reactor is configured to non-uniformly vary the electrical currents supplied to the magnetic coils.

9. A fusion reactor comprising:

two internal magnetic coils suspended within an enclosure; a center magnetic coil coaxial with the two internal magnetic coils and located proximate to a midpoint of the enclosure;

a plurality of encapsulating magnetic coils coaxial with the internal magnetic coils, the encapsulating magnetic coils being operable to preserve the magnetohydrodynamic (MHD) stability of the fusion reactor by maintaining a magnetic wall that prevents plasma within the enclosure from expanding; and

two mirror magnetic coils coaxial with the internal magnetic coils; and

wherein the fusion reactor is configured to vary electrical currents supplied to the magnetic coils to heat the plasma confined within the magnetic wall.

10. The fusion reactor of claim 9, wherein the fusion reactor is configured to supply electrical currents that cause the magnetic coils to form magnetic fields that confine the plasma along the surface of a magnetic wall.

11. The fusion reactor of claim 9, wherein the fusion reactor is configured to vary the electrical currents supplied to the center magnetic coil.

12. The fusion reactor of claim 11, wherein the fusion reactor is configured to vary the electrical currents supplied to the internal magnetic coils.

13. The fusion reactor of claim 12, wherein the fusion reactor is configured to vary the electrical currents supplied to the encapsulating magnetic coils.

14. The fusion reactor of claim 9, wherein the fusion reactor is configured to uniformly vary the electrical currents supplied to the magnetic coils.

15. The fusion reactor of claim 9, wherein the fusion reactor is configured to non-uniformly vary the electrical currents supplied to the magnetic coils.

16. A method comprising:

energizing two internal magnetic coils suspended within an enclosure;

energizing a center magnetic coil coaxial with the two internal magnetic coils and located proximate to a midpoint of the enclosure;

energizing a plurality of encapsulating magnetic coils coaxial with the internal magnetic coils, the encapsulating magnetic coils being operable, when energized, to preserve the magnetohydrodynamic (MHD) stability of the fusion reactor by maintaining a magnetic wall that prevents plasma within the enclosure from expanding; and

energizing two mirror magnetic coils coaxial with the internal magnetic coils; and

varying electrical currents supplied to the magnetic coils to heat the plasma confined within the magnetic wall.

17. The method of claim 16, wherein varying electrical currents supplied to the magnetic coils comprises varying the electrical currents supplied to the center magnetic coil.

18. The method of claim 17, wherein varying electrical currents supplied to the magnetic coils comprises varying the electrical currents supplied to the internal magnetic coils.

19. The method of claim 18, wherein varying electrical currents supplied to the magnetic coils comprises varying the electrical currents supplied to the encapsulating magnetic coils.

20. The method of claim 16, wherein varying electrical currents supplied to the magnetic coils comprises uniformly varying the electrical currents supplied to the magnetic coils.

\* \* \* \* \*