


The PureLine Topaz/THORs subsystem offers an end-toend solution for the satellite electric propulsion, in our most compact, innovative and flexible design ever. Specifically tailored to New Space types of applications, it features a lifetime of 10 years in LEO, with latch-up-free parts and error protection. Topaz/THORs is well suited for orbit raising, station keeping and deorbiting maneuvers. Topaz is based on low power Hall Effect Thruster Technology. Its building blocks can be configured to answer specific mission needs in terms of thrust, redundancy and mission lifetime.



Topaz/THORs elements are as follows:

- Hall Effect Thrusters (Low Power class)
- Xenon feed system (in charge of Xenon regulation, able to drive both pressure and mass flow rate)
- Power Processing unit (PPU)
- Power conditioning and control of the HET Thruster and Xenon feed system
- TM/TC interface with OBC via redundant CAN serial bus or MIL-1553 and discrete commands
- Xenon Tank: Scalable tank capacity according to mission needs

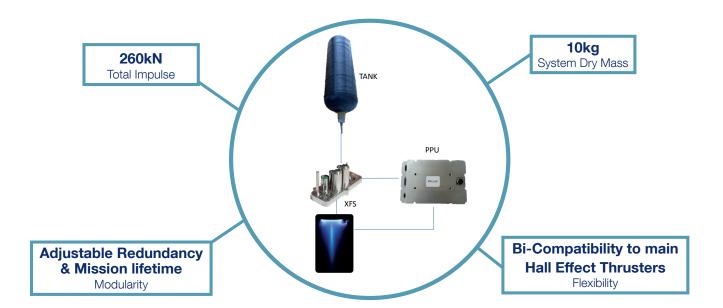

# **KEY FEATURES**

- End-to-end innovative & flexible solution
- User-friendly in thruster operations
- Breakthrough price-performance ratio
- Efficient integrated electric propulsion system
- Low power Hall Effect Thrusters
- Bi-compatibility to the latest generation plasma thrusters
- Xenon gas operated
- Compact module accommodation
- Simultaneous regulation of both pressure & flow rate
- Modular system to answer specific needs in terms of thrust, redundancy and mission life time
- High reliability with unprecedented flight heritage

## **ENVIRONMENT / RELIABILITY**

- Temperature: [-30°C; +60°C]
- Vibration level: // 18.3g Rms  $\perp$  9.5g Rms
- Shock level: 1 000g (10 000Hz)
- EMI/EMC: ECSS-E-ST-20-07C
- Reliability better than 950 FIT (FIDES standard)

#### **RADIATION**

- Latch-Up-Free parts
- Error Protection Mechanisms
- Total dose TID compatible with typical 10 years LEO

# **BUDGETS**

- System total impulse per string up to 260kN
- System Dry Mass 10kg (single configuration)

### **MAIN THRUSTER BUDGETS**

- Thrust per thruster @ 300V: 16mN
- Specific impulse: >1 200 seconds

#### **MAIN PPU BUDGETS**

- Output power: 300W
- Energy transfer efficiency > 90%
- COTS design

# **MAIN XENON TANK BUDGETS**

• Tank capacity up to 14kg

#### **INTERFACES**

- Input Power Bus I/F: 27-38V
- TM/TC interface: CANBUS (N&R) or MILBUS 1553

# **HERITAGE**

- Airbus quality legacy
- Automotive COTS process
- Baseline for traditional and new space missions
- On orbit since February 2019

### **Hardware and Functional architecture**

Topaz/THORs has been conceived as a flexible end-to-end solution to answer mission needs in terms of thrust, redundancy, total impulse and mission lifetime.

